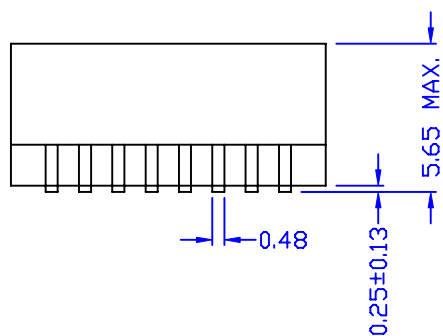
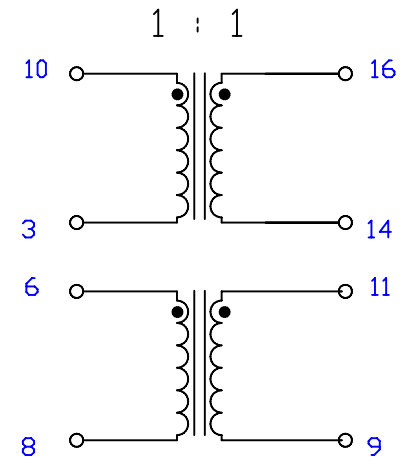
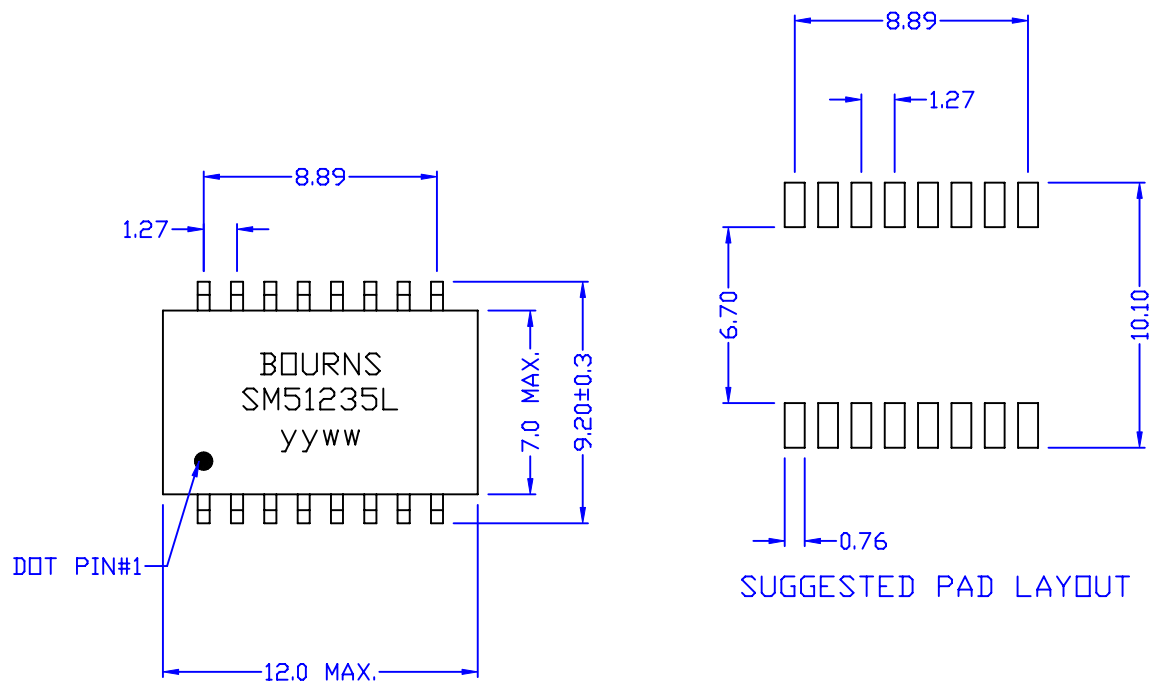


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1CT : 1CT(±5%)
2. DCL (@100KHz/0.1V) : 15uH MIN.(25°C)
3. CW/W (@100KHz/0.1V) : 5 pF MAX.
4. L.L (@100KHz/0.1V) : 0.1 uH MAX.
5. DCR : 0.2 OHM MAX.
6. HI-POT : 2000 Vrms.
7. RoHS COMPLIANT.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. SM51235EL
						UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						11/02/07		