

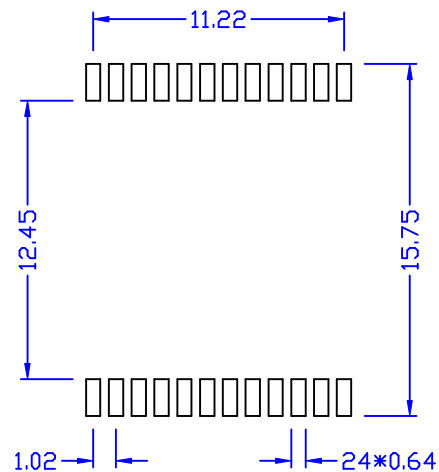
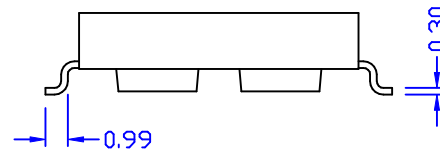
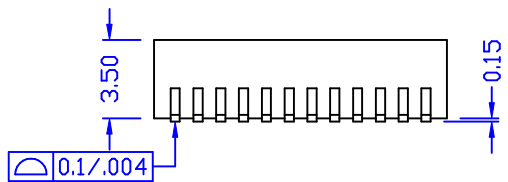


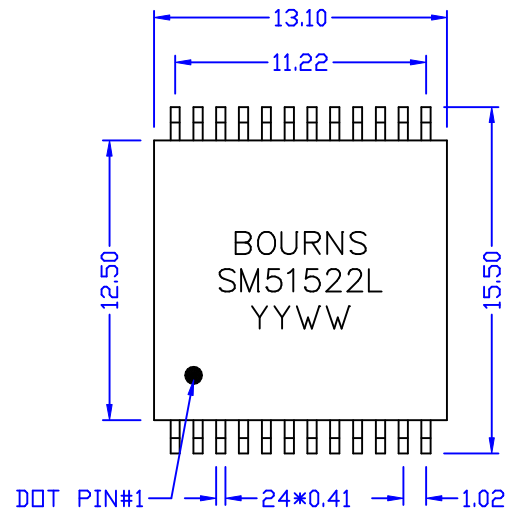

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

PACKING 1 REEL 400PCS. ONE CARTON 800PCS.

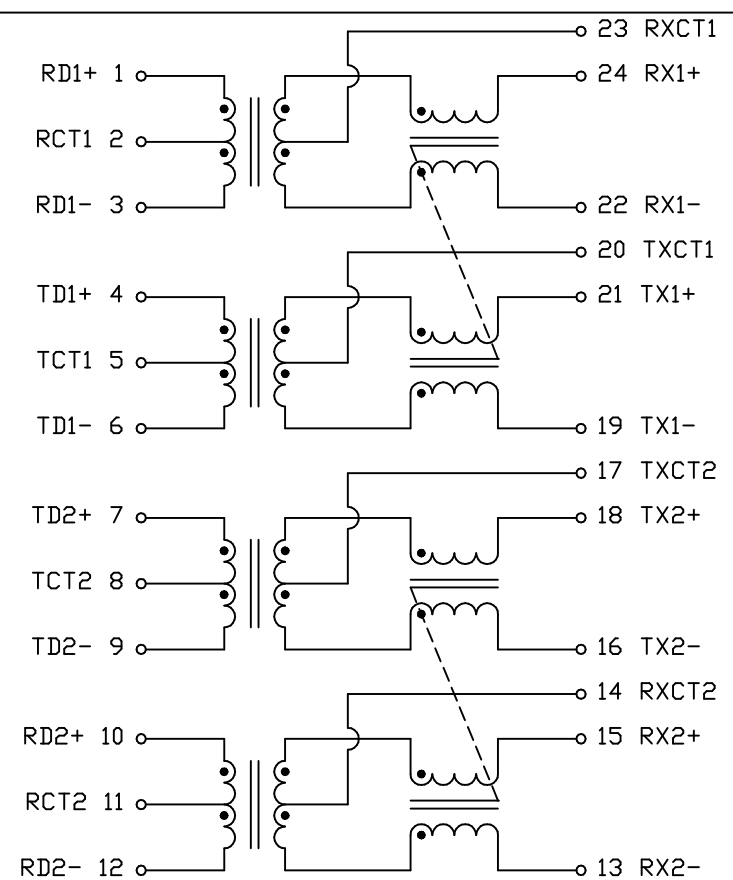

ELECTRICAL SPECIFICATIONS@25°C : <H2006A COMPATIBLE>

1. TURNS RATIO TX/RX : 1CT : 1CT
2. PRI OCL <100KHZ/0.1V WITH 8mA DC BIAS> : 350uH MIN.
3. DC RESISTANCE BALANCE <= 3.5%
4. HI-POT : 1500Vrms
5. CROSS TALK : 60MHZ = -37dB MIN.
100MHZ = -31dB MIN.
6. INSERTION LOSS : 1-100MHZ = -1.2dB MAX.
7. RETURN LOSS <@100 OHM> : 1-30MHZ = -16dB MIN.
40MHZ = -14dB MIN.
50MHZ = -13dB MIN.
60-80MHZ = -12dB MIN.
8. DMRR : 30MHZ = -43dB MIN.
60MHZ = -37dB MIN.
100MHZ = -33dB MIN.
9. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. SM51522EL	
	RELEASE	02/06/2006	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 10F 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						02/06/06			