
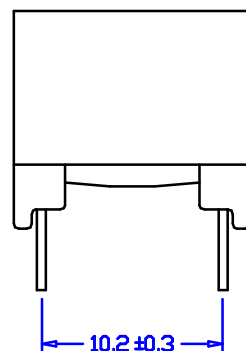
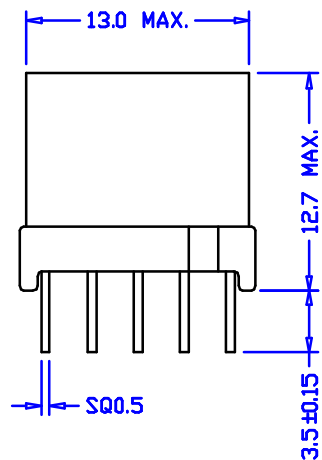
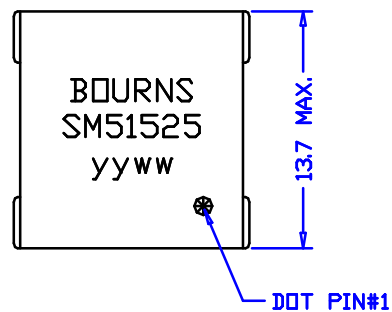


ELECTRICAL CHARACTERISTICS : <FOR 50772 COMPATIBLE>

1. DCR : PIN 1-4 = 2-5 = 2.92 OHM MAX.
PIN 9-7 = 1.47 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 2mH ± 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-5 (2-4 7-9 SHORT) = 20uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-9 (4-2 SHORT) = 70pF MAX.
5. TURN RATIO (@480KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 2 ± 1%
6. HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co. Ltd. TEL:02-2794-6657 FAX:02-2794-0804		TITLE ADSL TRANSFORMER	
								DWG. NO. SM51525	
	RELEASE	05/16/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO	DESCRIPTION	DATE	BY	CHK	APP'D	DATE		DRAW Patr	
REVISIONS						05/16/05			