

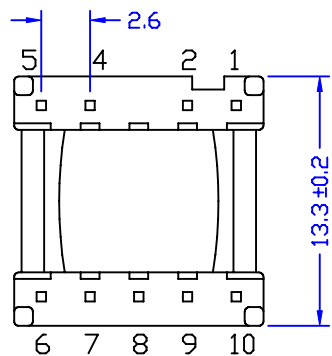
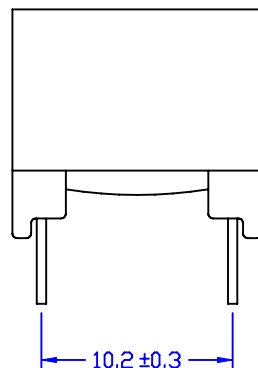
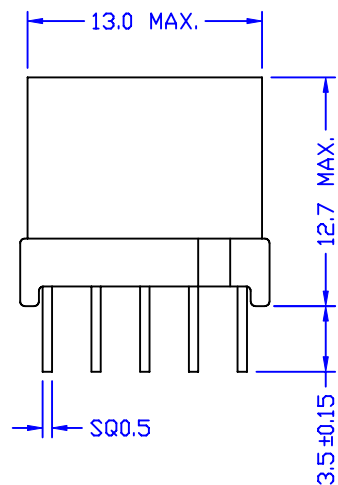


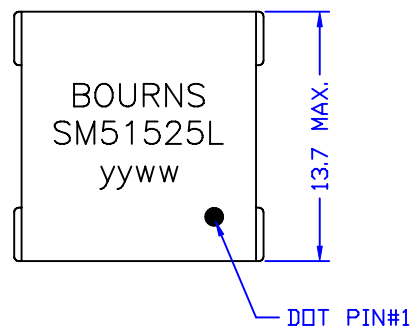

2SP : 1

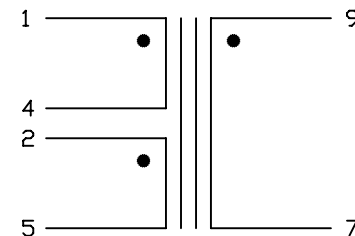

ELECTRICAL CHARACTERISTICS : <FOR 50772 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 2.92 OHM MAX.
PIN 9-7 = 1.47 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 2mH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-5 (2-4 7-9 SHORT) = 20uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-9 (4-2 SHORT) = 70pF MAX.
- TURN RATIO (@480KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 2 ± 1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

						Bourns Inductive Solution		TITLE ADSL TRANSFORMER	
								DWG. NO. SM51525L	
	RELEASE	09/11/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						09/11/07			