
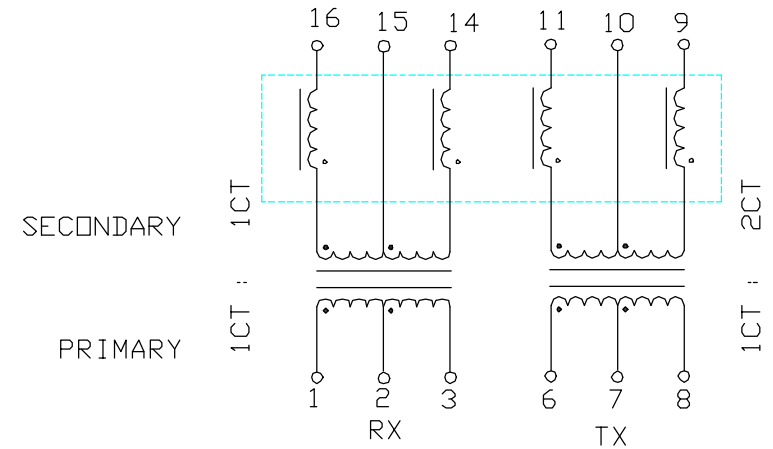

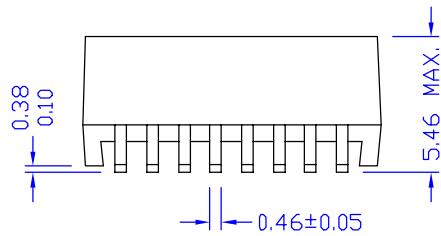


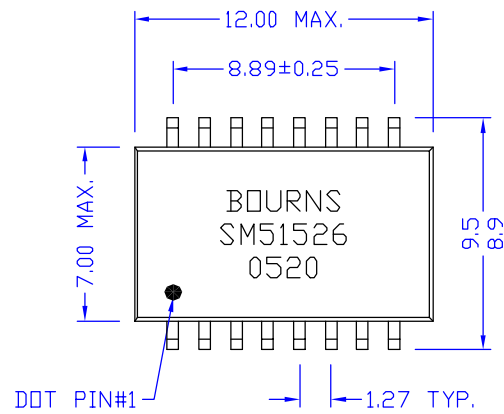

ELECTRICAL CHARACTERISTICS : (23Z467SM COMPATIBLE)

1. D.C.R. : 0.3 OHM MAX. (EACH WINDING)
2. INDUCTANCE (@100KHZ, 50mV) : PRI. = 140uH MIN.
3. LEAKAGE INDUCTANCE (@100KHZ, 50mV) :
PIN 1-3 (PIN 14-16 SHORT) = 0.4uH MAX.
PIN 6-8 (PIN 9-11 SHORT) = 0.4uH MAX.
4. INTERWINDING CAP. (@100KHZ, 50mV) : PRI.-SEC. = 15pF MAX.
5. TURNS RATIO : PIN 1-3 : PIN 16-14 = 1CT : 1CT
PIN 6-8 : PIN 11-9 = 1CT : 2CT
6. COMMON CHOKE INDUCTANCE : (@100KHZ, 50mV) 30uH TYP. (EACH WINDING)
7. HI-POT (@2000VAC, 1mA, 2SEC) : PRI.-SEC.

						Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T TRANSFORMER	
								DWG. NO. SM51526	
	RELEASE	05/16/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						05/16/05		Pair	