
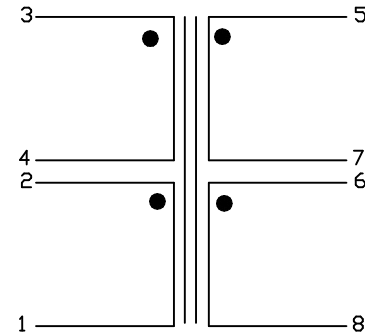
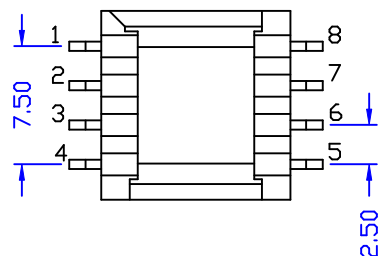

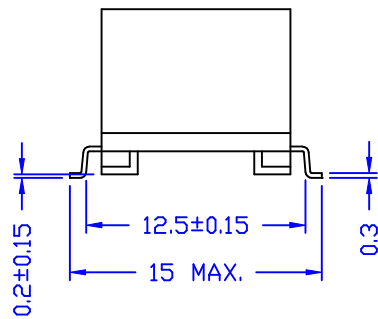



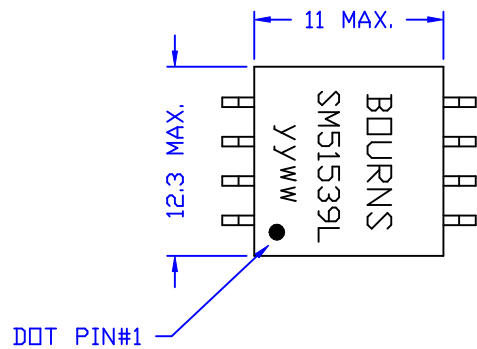

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-1 = 1.12 OHM +/-10%
PIN 3-4 = 0.96 OHM +/-10%
PIN 5-7 = 0.138 OHM +/-20%
PIN 6-8 = 0.138 OHM +/-20%
- INDUCTANCE : (@300KHZ, 0.1Vrms) PIN 3-4 = 1.9mH +/-25%
- LEAKAGE INDUCTANCE(@100KHZ,0.1Vrms) : 3-4(5,6,7,8, SHORT) = 15uH MAX.
- TURN RATIO(@100KHZ,0.1Vrms) 3-4 : 5-7 = 1.2+/-2%
3-4 : 6-8 = 1.2+/-2%
2-1 : 3-4 = 3.9+/-2%
- HI-POT : (@1.5KV, 1mA, 1SEC) 1-5 , 4-6
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	TRANSFORMER
								DWG. NO.	SM51539EL
	RELEASE	05/03/2006	PAIR	VINCENTEUGENE	UNITS: M/M		SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS					05/03/06				