

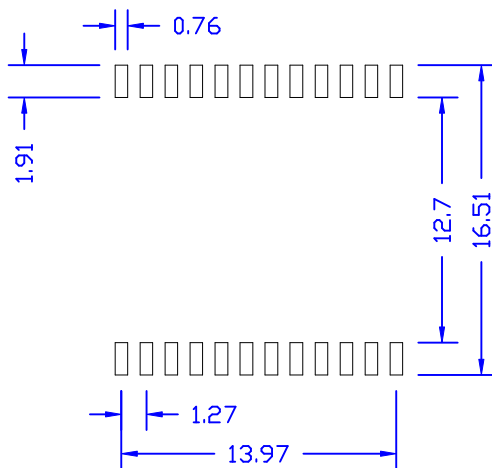
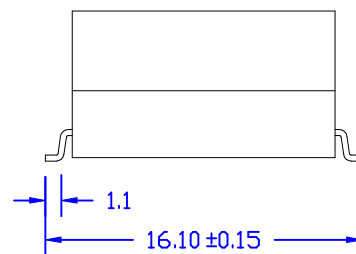
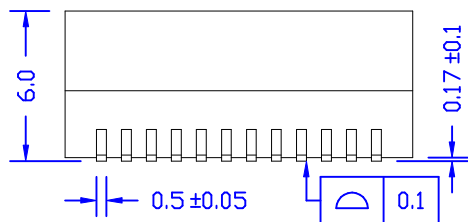


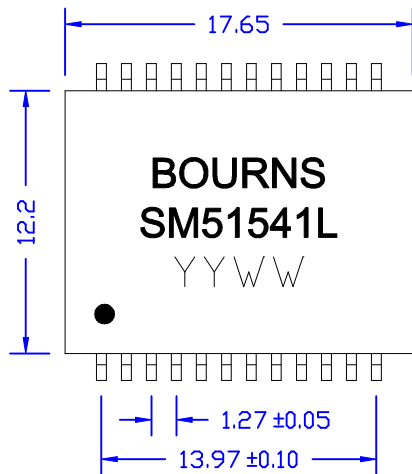

TOLERANCES : ± 0.25

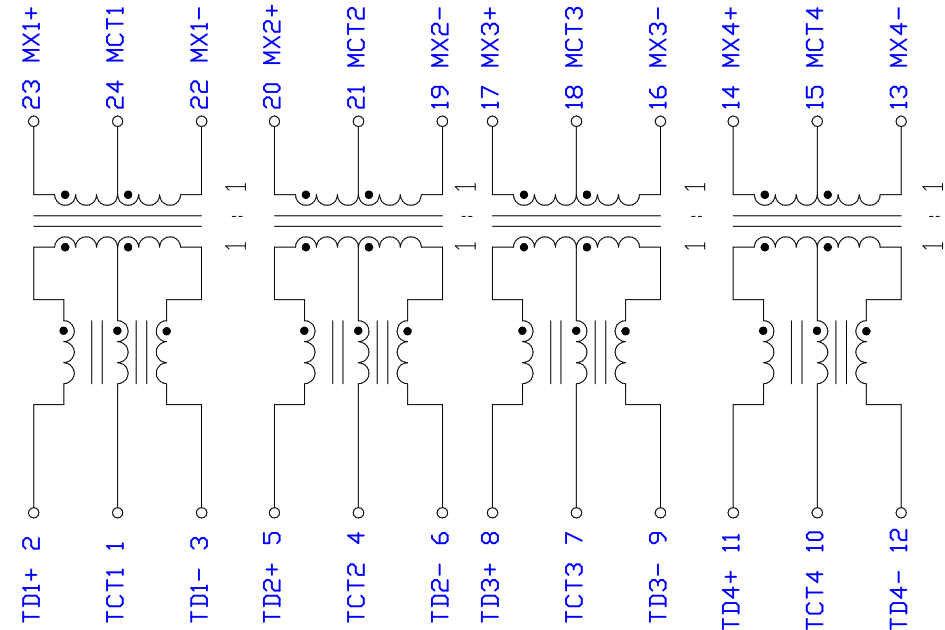

ELECTRICAL SPECIFICATIONS@25°C :

- TURN RATIO : TX/RX = 1CT : 1
- CROSSTALKS (dB MIN) : 30MHZ 60MHZ 100MHZ
-43dB -37dB -33dB
- INSERTION LOSS (dB MAX) :
0.1MHZ 100MHZ 125MHZ
-1.1dB -1.0dB -2.0dB
- RETURN LOSS (dB MIN) : @100 OHM +/-15%
30MHZ 60MHZ 80MHZ 100MHZ
-18dB -12dB -12dB -10dB
- HI-POT : 1500Vrms
- RoHS COMPLIANT
- REEL PACKING

						Atech®		TITLE MODULES TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		SM51541EL	
RELEASE		05/16/2006	PAIR	AL	EUGENE	UNITS:		SAFETY	
DESCRIPTION		DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						05/16/06		Pair	