
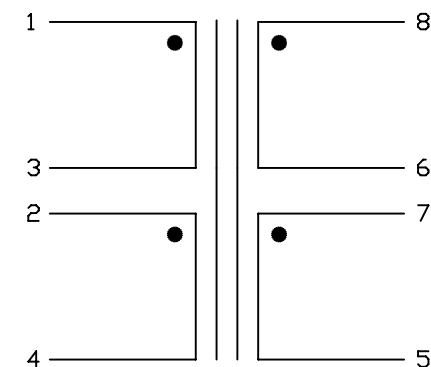
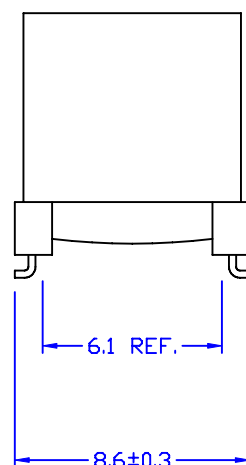
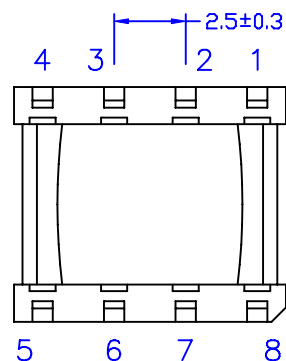
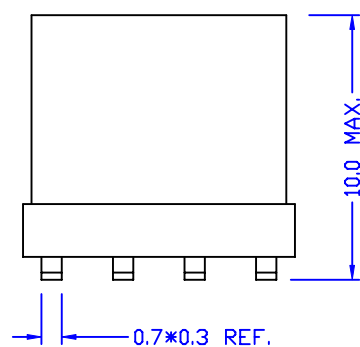


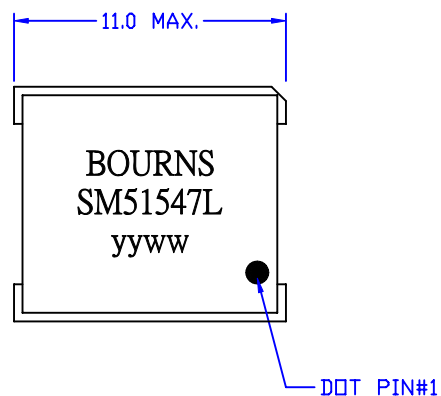

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 2 OHM MAX.
PIN 8-5 (6-7 SHORT) = 1.15 OHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 1-4 (2-3 SHORT) = 470 uH ±10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 1MHZ) :
PIN 1-4 (2-3, 5-6-7-8 SHORT) = 1 uH MAX.
- INTERWINDING CAP. (@0.1Vrms, 100KHz) :
PIN 1-8 (1-2-3-4, 5-6-7-8 SHORT) = 75 pF MAX.
- DISTRIBUTED CAP. (@17MHZ, 0.1Vrms) : 1-4 = 15pF MAX.
- TURN RATIO (@0.1Vrms, 100KHz) :
PIN 1-4:8-5 (2-3, 6-7 SHORT) = 1.333 ±1%.
- HI-POT (@1500VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIACNE.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE		TRANSFORMER	
								DWG. NO.		SM51547EL	
	RELEASE	09/14/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW		Pair	
REVISIONS						09/14/06					