
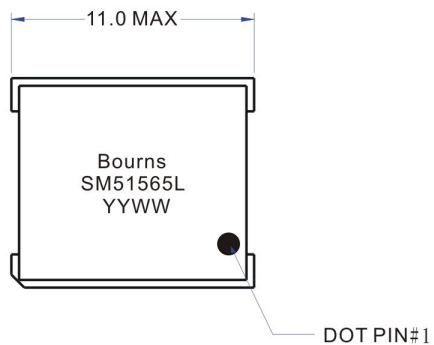


ELECTRICAL CHARACTERISTICS :

- 1.D.C.R. : PIN 1-4 = 1.95 OHM +/- 20%
PIN 8-5 = 2.05 OHM +/- 20%(PIN 7-5 SHORT)
- 2.INDUCTANCE(@10K HZ , 0.1 Vrms) :
PIN 1-4 = 1.4 +/- 12%
- 3.LEAKAGE INDUCTANCE(@100K HZ , 0.1Vrms) :
PIN 1-4 = 55 uH MAX.(5-6-7-8 SHORT)
- 4.TURN RATIO(@10K HZ , 0.1Vrms) :
PIN 1-4 : 8-5 = 1.33 +/- 5%.
- 5.HI-POT(@1500 VAC , 1mA , 2 SEC) : PRI-SEC.
- 6.T.H.D.(@30K HZ , 3.0Vrms) : PRI = -60 dB MAX.
- 7.RoHS COMPLIANT.

						Bourn Inductive Solution		TITLE ADSL TRANSFORMER	
								DWG NO. SM51565L	
	RELEASE	08/27 /2008	Isaac	Willie	Eugene	UNITS M/M	SAFETY	SHEET 1 / 1	
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080827	P/N	DRAW Isaac	
REVISIONS									