

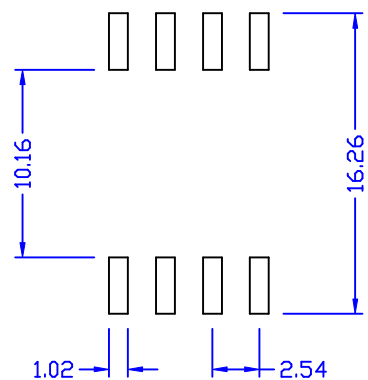




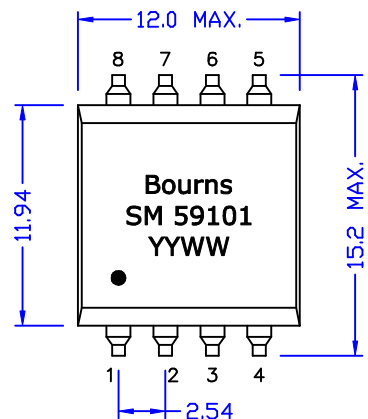

SUGGESTED FOOTPRINT



ELECTRICAL CHARACTERISTICS : <PE-65857 COMPATIBLE>

1. DCR : PIN 1-8 = 2-7 = 3-6 = 4-5 = 0.3 OHM MAX.
2. INDUCTANCE (@100KHZ, 50mVrms) :
PIN 1-8 = 2-7 = 3-6 = 4-5 = 22.5uH MIN.
3. INTERWINDING CAP. (@100KHZ, 50mVrms) : 17pF MAX.
4. TURNS RATIO (@1.5MHZ, 0.1Vrms) :
PIN 1-8 : 2-7 : 3-6 : 4-5 = 1 : 1 : 1 : 1 ± 2%
5. LEACKAGE INDUCTANCE (@100KHZ, 50mVrms) : 0.23uH MAX.
6. HI-POT (@500Vrms, 1mA, 2SEC) : WINDING-WINDING

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE EMI QUAD CHOKE	
								DWG. NO. SM59101	
	RELEASE	02/10/2004	PAIR	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						02/10/04		DRAW <i>Pair</i>	