
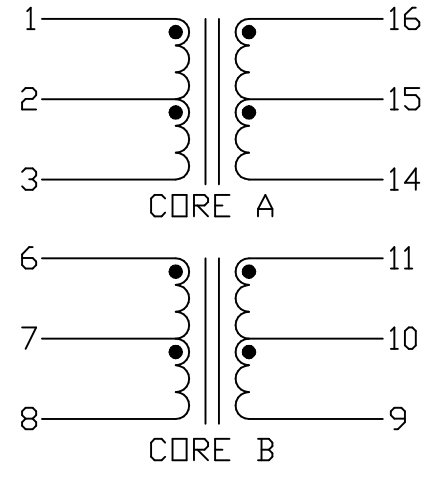
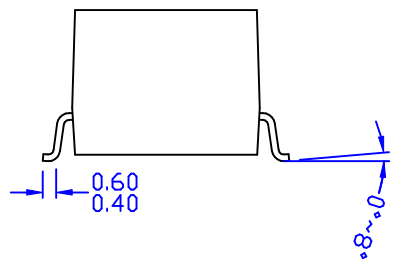
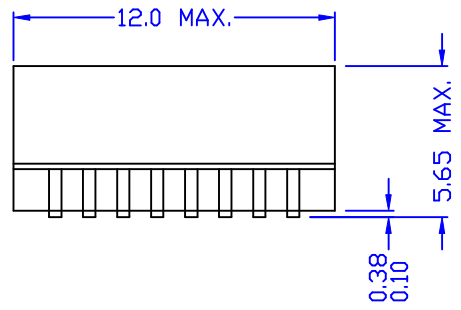


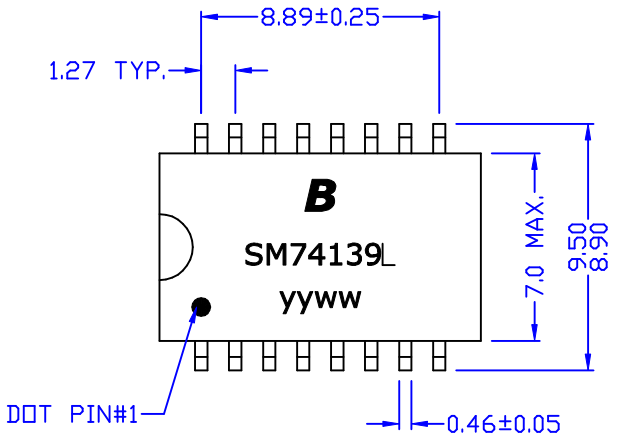

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : CORE A & CORE B = 1CT : 1.15CT $\pm 2\%$
2. OCL (10KHZ, 0.1Vrms) : CORE A & CORE B = 1.2mH MIN.
3. LL (100KHZ, 0.1Vrms) : CORE A & CORE B = 0.6uH MAX.
4. HI-POT : 1500Vrms
5. CWV : CORE A & CORE B = 30pF MAX.
6. DCR : 1-3 = 6-8 = 0.7 OHM MAX. , 16-14 = 11-9 = 0.75 OHM MAX.
7. REEL PACKING
8. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE T1/CEPT/ISDN-PRI TRANSFORMER	
							DWG. NO. SM74139EL	
	RELEASE	03/27/2006	PAIR	AL	EUGENE		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						03/27/06	DRAW <i>Pair</i>	