
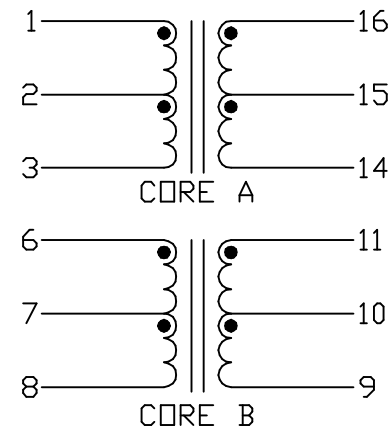
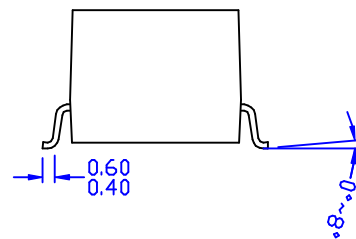
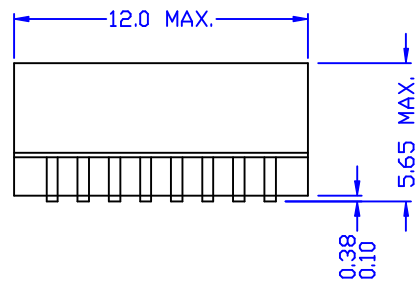


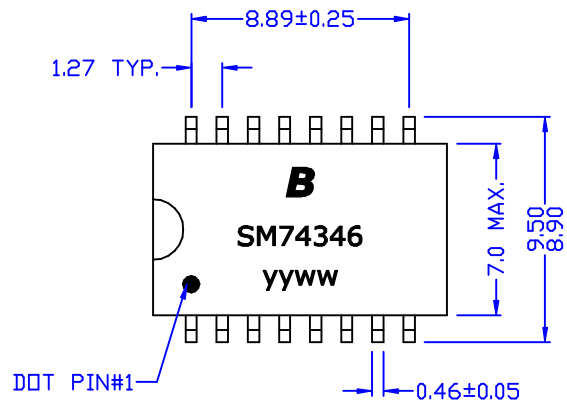

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 16-14 : 1-3 = 6-8 : 11-9 = 1CT : 2CT $\pm 5\%$
2. DCL (10KHZ, 0.1Vrms) : CORE A(16-14) & CORE B(6-8) = 1.2mH MIN.
3. LL (100KHZ, 0.1Vrms) : 16-14 (SHORT 1-3) = 6-8 (SHORT 9-11) = 0.6uH MAX.
4. HI-POT : 1500Vrms
5. CWW : 16-1 = 6-11 = 30pF MAX.
6. DCR : 1-3 = 11-9 = 1.4 OHM MAX. , 16-14 = 6-8 = 0.7 OHM MAX.
7. REEL PACKING

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/CEPT/ISDN-PRI TRANSFORMER	
								DWG. NO. SM74346E	
	RELEASE	03/03 /2005	PAIR	SUEDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS									