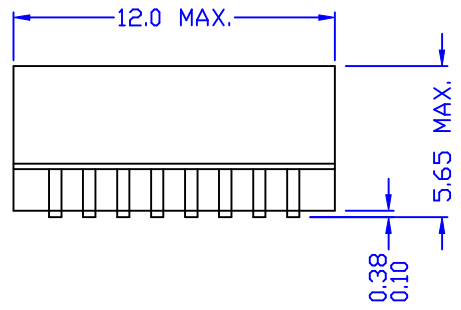
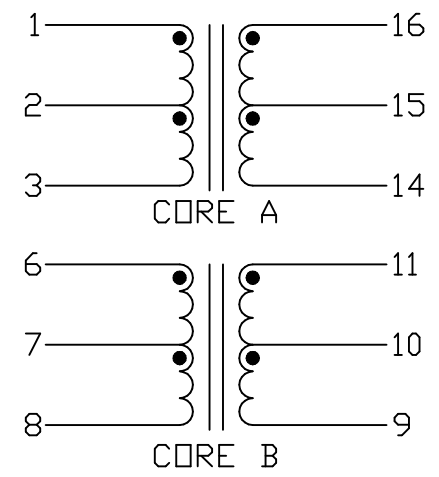
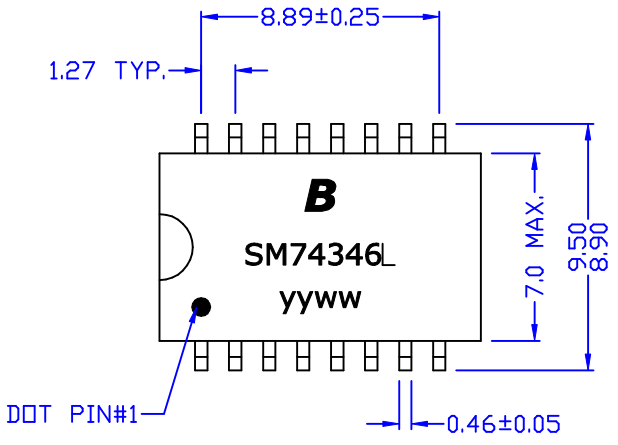


# ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 16-14 : 1-3 = 6-8 : 11-9 = 1CT : 2CT ±5%
2. OCL (10KHZ, 0.1Vrms) : CORE A(16-14) & CORE B(6-8) = 1.2mH MIN.
3. LL (100KHZ, 0.1Vrms) : 16-14 (SHORT 1-3) = 6-8 (SHORT 9-11) = 0.6uH MAX.
4. HI-POT : 1500Vrms
5. CWV : 16-1 = 6-11 = 30pF MAX.
6. DCR : 1-3 = 11-9 = 1.4 OHM MAX. , 16-14 = 6-8 = 0.7 OHM MAX.
7. REEL PACKING
8. RoHS COMPLIANCE

|           |             |            |      |     |        |                                                                                                      |                                    |           |
|-----------|-------------|------------|------|-----|--------|------------------------------------------------------------------------------------------------------|------------------------------------|-----------|
|           |             |            |      |     |        | <div>Atech®</div> <div>Atech Technology Co., Ltd.</div> <div>TEL:0212794-6667 FAX:0212794-8004</div> | TITLE T1/CEPT/ISDN-PRI TRANSFORMER |           |
|           |             |            |      |     |        |                                                                                                      | DWG. NO.                           | SM74346EL |
|           | RELEASE     | 03/27/2006 | PAIR | AL  | EUGENE |                                                                                                      | UNITS: M/M                         | SAFETY    |
| NO.       | DESCRIPTION | DATE       | BY   | CHK | APPD   | DATE                                                                                                 | SHEET 1 OF 1                       |           |
| REVISIONS |             |            |      |     |        | 03/27/06                                                                                             | DRAW<br><i>Pair</i>                |           |