

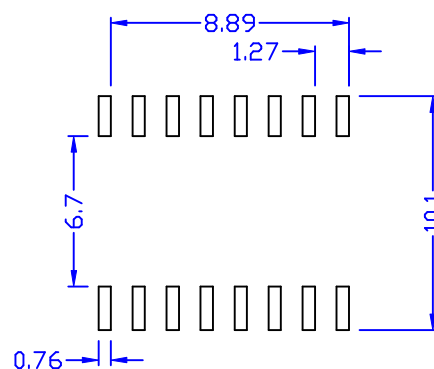
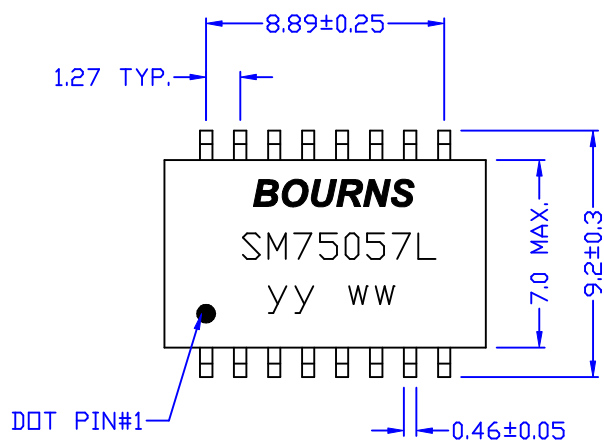
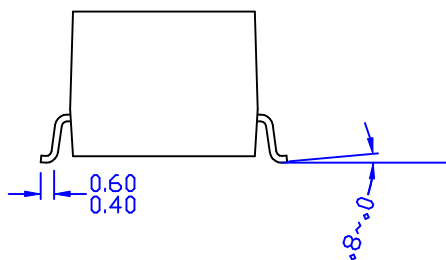


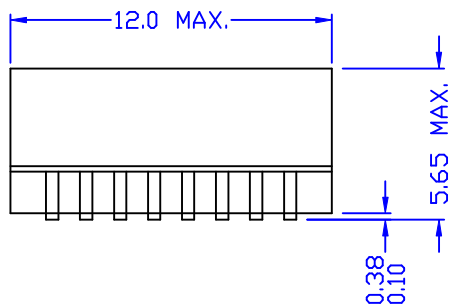

RECOMMENDED PAD LAYOUT

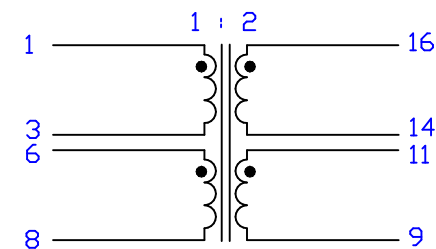

SPECIFICATIONS :

1. D.C.R. : PIN 1-3 = 6-8 = 0.5-0.8 Ω M
PIN 16-14 = 11-9 = 0.9-1.6 Ω M
2. TURNS RATIO : 1 : 2 $\pm$ 2%
3. $\square$ CL(@10KHz/0.1V) : 1.2mH MIN.
 $\square$ CL(@10KHz/0.1V) : 600 μ H MIN.(-40°C TO +85°C)
4. L.L(@100KHz/0.1V) : 0.6 μ H MAX.
5. CW/W(@100KHz/0.1V) ; 30pF MAX.
6. HI-POT : 2000VRMS
7. RoHS COMPLIANCE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/CEPT/ISDN-PRI TX	
								DWG. NO. SM75057EL	
	RELEASE	02/10/2006	PAIR	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						02/10/06			<i>Pair</i>