
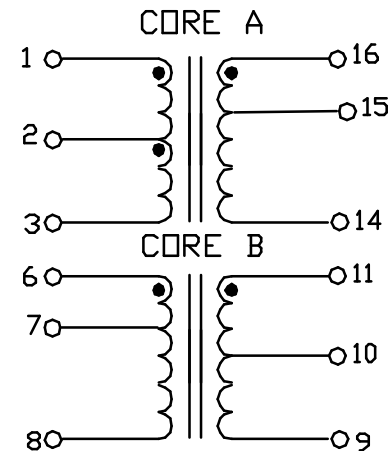
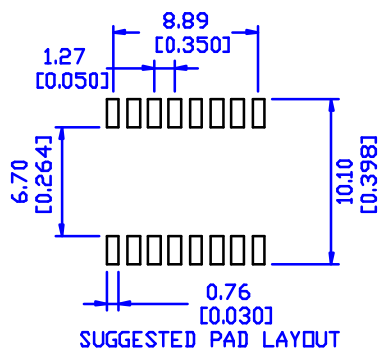
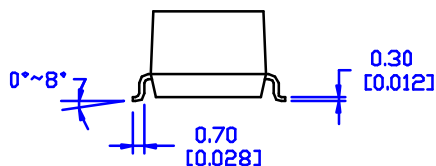
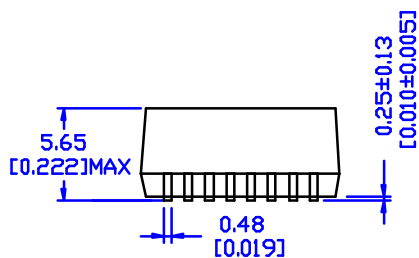


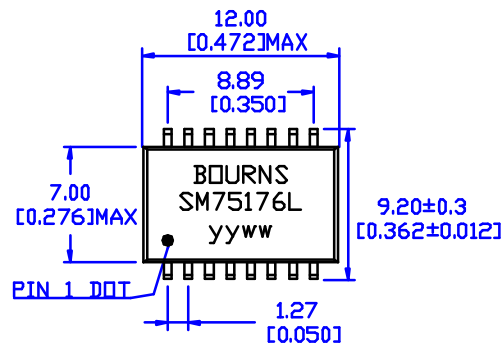

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO :
PIN 1-2:2-3:16-15:15-14 = 1:1:0.26:1 ± 5%.
PIN 6-7:11-10:10-9:7-8 = 0.26:1:1:1 ± 5%.
2. $\square$ CL (@10KHz/0.01V) :
CORE A (PIN 16-14) = 1.5 mH MIN.
CORE B (PIN 6-8) = 1.5 mH MIN.
3. L.L (@100KHz/0.1V) :
PIN 16-14 (SHORT 1-2-3) = 0.5 μ H MAX.
PIN 6-8 (SHORT 9-10-11) = 0.5 μ H MAX.
4. HI-POT : 1500 Vrms.
5. CW/W :
PIN 16-15-14 TO 1-2-3 = 40 pF MAX.
PIN 6-7-8 TO 9-10-11 = 40 pF MAX.
6. DCR :
PIN 1-3 = 1.1 $\square$ HM MAX.
PIN 11-9 = 1.1 $\square$ HM MAX.
PIN 16-14 = 0.7 $\square$ HM MAX.
PIN 6-8 = 0.7 $\square$ HM MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25mm

				Atech®		TITLE T1/CEPT/ISDN-PRI TRANSFORMER	
				Atech Technology Co., Ltd.		DWG. NO. SM75176EL	
				TEL: 02-2794-6667 FAX: 02-2794-8084			
RELEASE	07/05/2005	BART	MICHAEL SUE DY	UNITS: mm (INCHES)		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	SHEET 1 OF 1	
REVISIONS						DRAW <i>Patr</i>	
						DATE 07/05/05	