
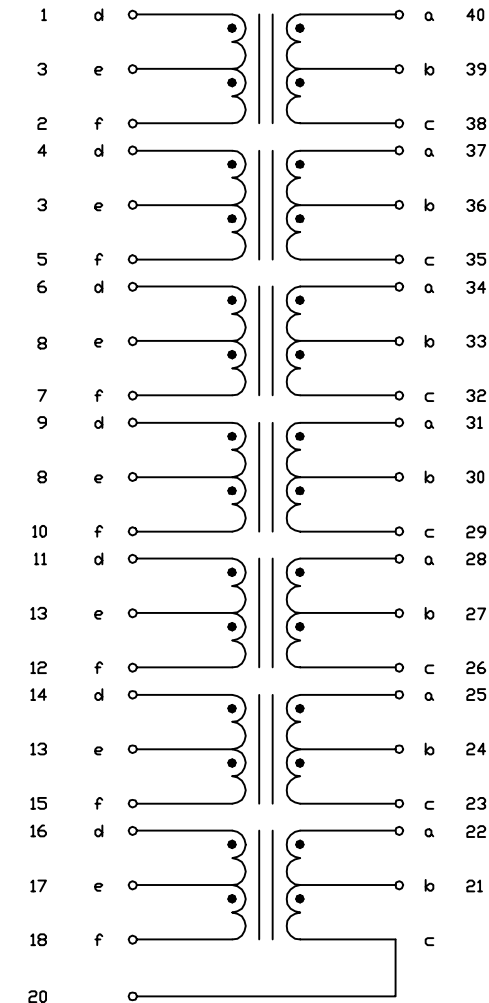


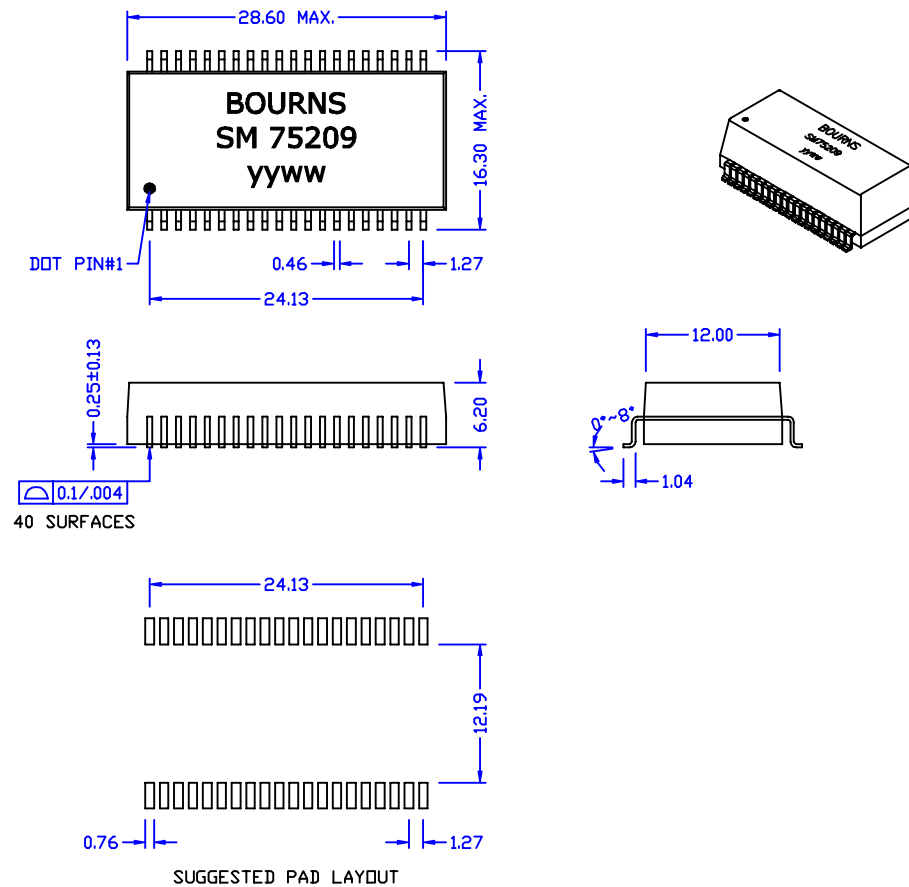

# ELECTRICAL SPECIFICATIONS @25°C :

1. TURNS RATIO :  
PIN a-c : d-f (±1.5%) = 1 : 1CT  
PIN a-b : b-c (±2%) = 3.727 : 1
2. OCL (a-c) (@10KHZ/0.1V) : 2.42-5.95 mH.
3. DCR (a-c) : 1.5 OHM MAX.
4. DCR (d-f) : 1.5 OHM MAX.
5. HI-PDT : 350 VAC.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

|           |             |            |      |     |       |                                                                                |  |                          |  |
|-----------|-------------|------------|------|-----|-------|--------------------------------------------------------------------------------|--|--------------------------|--|
|           |             |            |      |     |       | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL:022794-6667 FAX:022794-8004 |  | TITLE SIGNAL TRANSFORMER |  |
|           |             |            |      |     |       |                                                                                |  | DWG. NO. SM75209         |  |
|           | RELEASE     | 02/17/2004 | BART | AL  | SUEDY | UNITS: M/M                                                                     |  | SAFETY                   |  |
| NO:       | DESCRIPTION | DATE       | BY   | CHK | APPD  | DATE                                                                           |  | SHEET 1 OF 1             |  |
| REVISIONS |             |            |      |     |       | 02/17/04                                                                       |  | DRAW Pair                |  |