

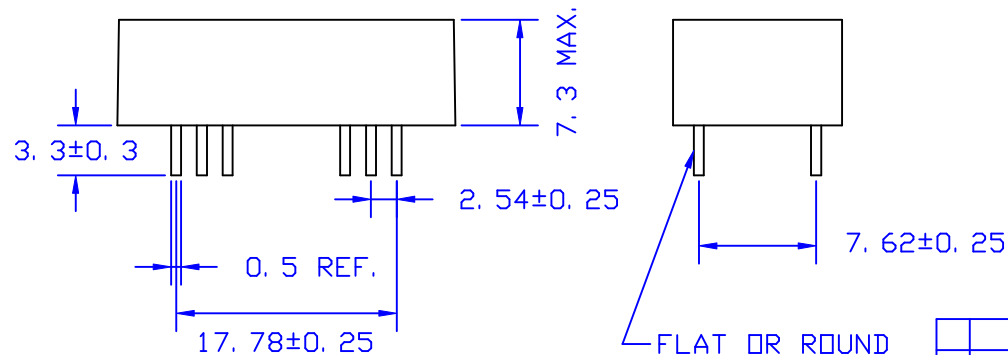


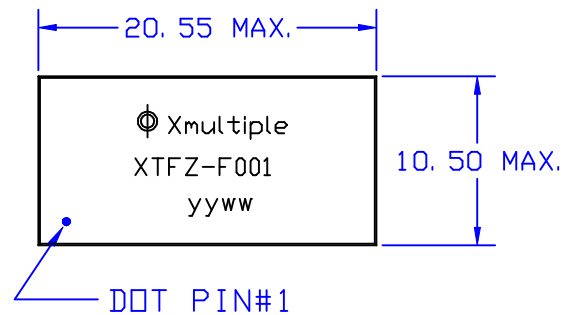

FLAT OR ROUND

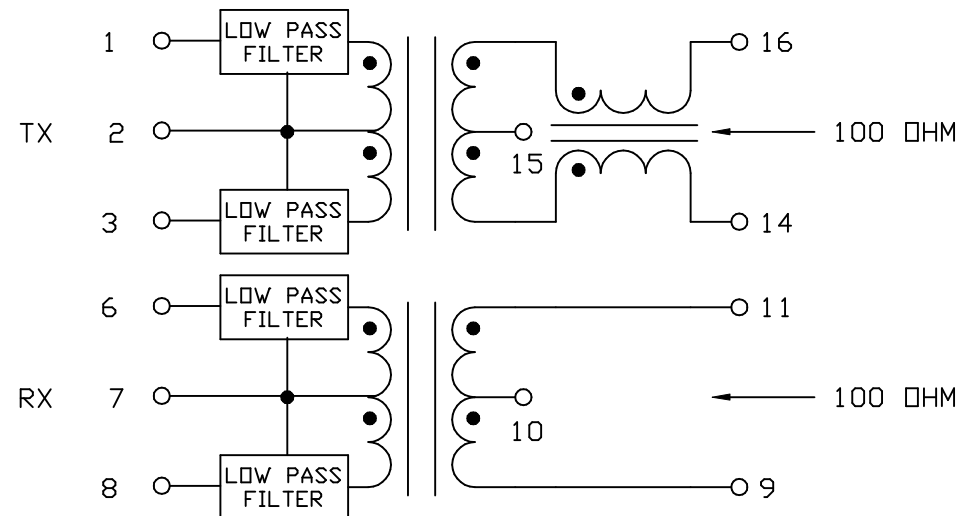

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO TX/RX : 1CT:1CT.
2. CUT-OFF FREQUENCY : 17MHZ±0.7MHZ.
3. PRI CW/W : 25 pF MAX.
4. HI-POT : 1500 Vrms.
5. TYPE (POLE) : TX = 7
RX = 5
6. INSERTION LOSS : 1~10 MHZ = -1.0 dB MAX.
7. RETURN LOSS : 1~5 MHZ = -15 dB MIN.
5~12 MHZ = -13.5 dB MIN.
8. CROSS TALK : 1~10 MHZ = -30 dB MIN.
9. ATTENUATION TX/RX :
20 MHZ = -7/-6 dB MIN.
25 MHZ = -19/-14 dB MIN.
30 MHZ = -28/-20 dB MIN.
40 MHZ = -35/-31 dB MIN.
10. CMRR : 100MHZ = -30 dB MIN.

						Atech® Atech Technology Co., Ltd. TEL: 02/2794-6667 FAX: 02/2794-8004	TITLE 10 BASE-T L/P FILTER	
							DWG. NO. XTFZ-F001	
	RELEASE	11/03/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/03/04		