

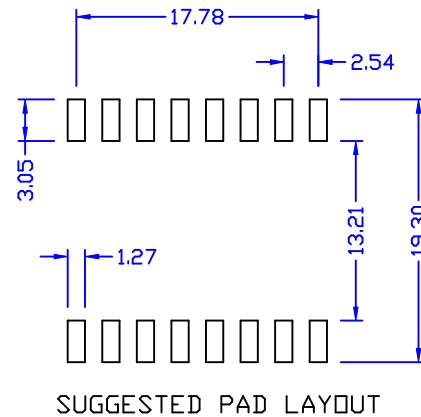



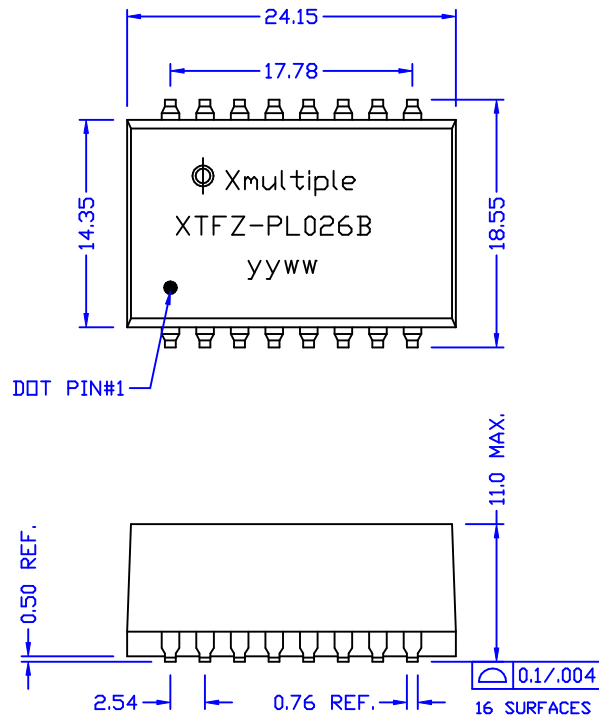

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE  $\pm 0.25$

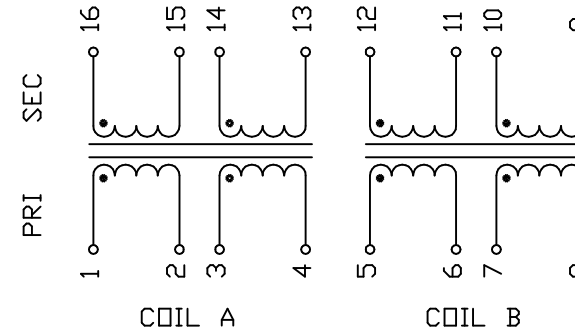

## ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1CS:2.5CS  $\pm 2\%$ .
2. OCL : 22 mH MIN.
3. CW/W : 100 pF MAX.
4. L.L SEC : 40 uH MAX.
5. CD PRI : 110 pF MAX.
6.  $\Delta I_{DC}$  : 1 mA MAX.
7. DCR : PRI 2.4 OHM  $\pm 25\%$ .  
SEC 5.3 OHM  $\pm 25\%$ .
8. HI-POT : 2000 Vrms.

|           |             |            |      |     |       |                                                                                |                           |        |
|-----------|-------------|------------|------|-----|-------|--------------------------------------------------------------------------------|---------------------------|--------|
|           |             |            |      |     |       | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL:022794-6667 FAX:022794-0004 | TITLE ISDN<br>TRANSFORMER |        |
|           |             |            |      |     |       |                                                                                | DWG. NO.<br>XTFZ-PL026B   |        |
|           | RELEASE     | 11/11/2004 | BART | AL  | SUEDY |                                                                                | UNITS:<br>M/M             | SAFETY |
| NO        | DESCRIPTION | DATE       | BY   | CHK | APPD  |                                                                                |                           |        |
| REVISIONS |             |            |      |     |       | 11/11/04                                                                       | DRAW                      | Pair   |