
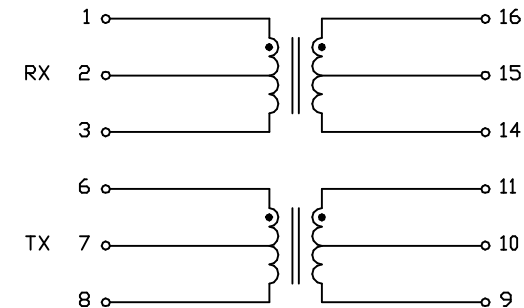
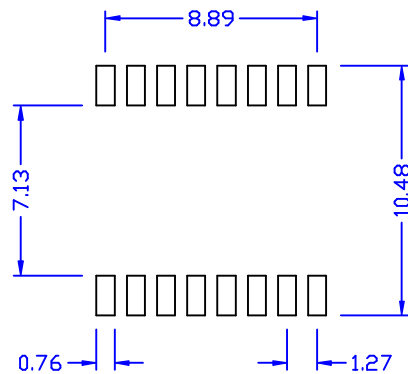
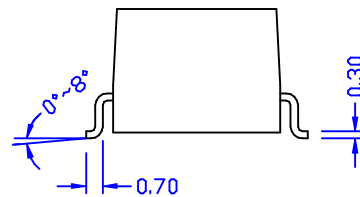
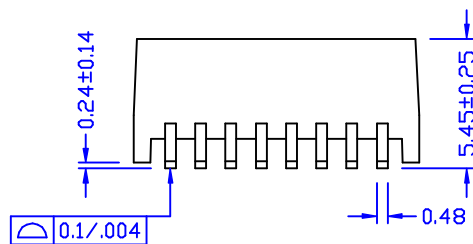


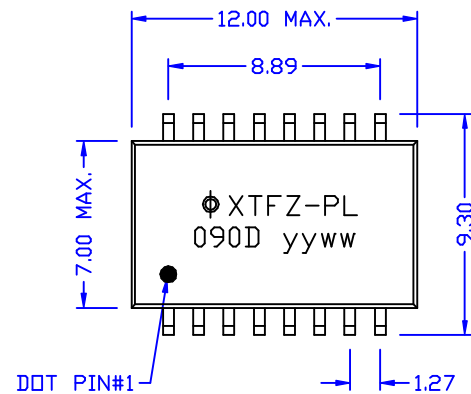

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO (±5%) : TX = 1CT : 2CT
RX = 1CT : 1CT
2. DCL : 140uH MIN.
3. CW/W : 12pF MAX.
4. L.L : 0.3uH MAX.
5. PRI DCR : 0.6 OHM MAX.
6. HI-POT : 1500Vrms
7. PRIMARY PINS : PIN 6-8/1-3

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL: 02/2794-6667 FAX: 02/2794-8004	TITLE 10 BASE-T-SMT TRANSFORMER	
							DWG. NO. XTFZ-PL090D	
	RELEASE	02/25/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						02/25/05	DRAW <i>Pair</i>	