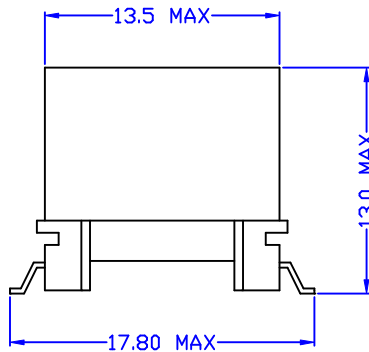

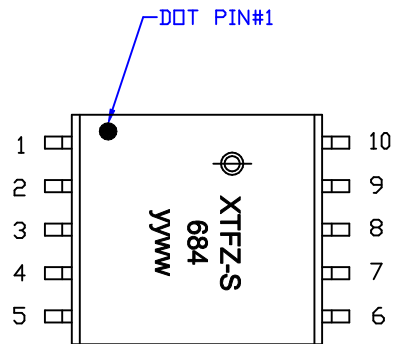


NONE TOLERANCE FOR REFERENCE

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 10 Ω HM $\pm$ 12%
PIN 4-5 = 10 Ω HM $\pm$ 12%
PIN 6-8 = 5.46 Ω HM $\pm$ 12%
PIN 8-10 = 7.8 Ω HM $\pm$ 12%
- INDUCTANCE :
(@10KHZ, 0.1Vrms) PIN 1-5 (2-4 SHORT) = 28mH $\pm$ 8%
(@40mA) PIN 1-5 (2-4 SHORT) = 25.5mH MIN.
- RETURN LOSS (@REF 100 Ω HM, PIN 10-6 W/H 64 Ω HM) :
FROM 10KHZ ~ 25KHZ = 13dB MIN.
- LONGITUDINAL BAL: FROM 282HZ ~ 40KHZ = 55dB MIN.
- TURN RATIO :
(@94KHZ, 1Vrms) PIN 1-5 : 10-6 (2-4 SHORT) = 1.25 $\pm$ 1%
- HI-POT (@1875VAC, 0.5mA, 2S) : PIN 1-10 (2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ISDN TRANSFORMER	
							DWG. NO. XTFZ-S684	
A	MARKING	11/25/2004	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	10/20/2004	BART	MICHAEL	SUEDY			
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW	
REVISIONS						10/20/04	<i>Pair</i>	