
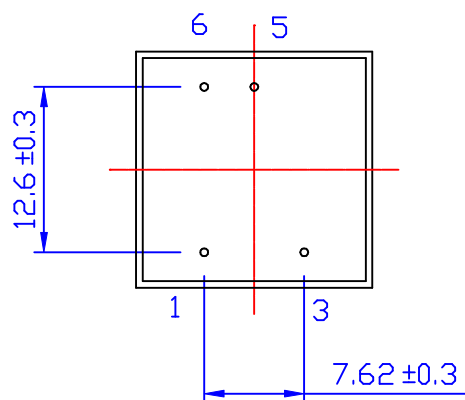
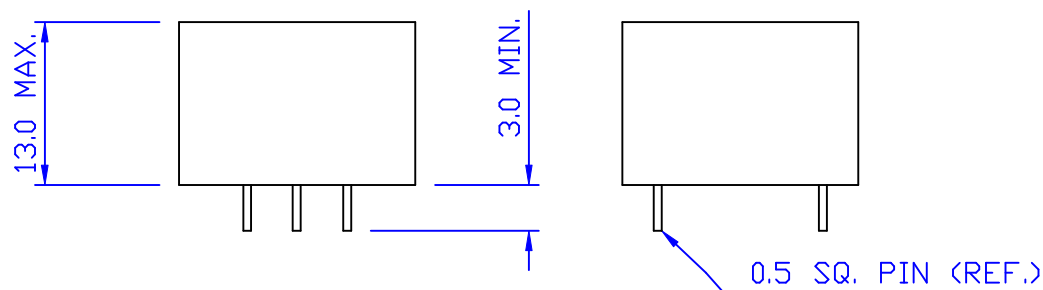
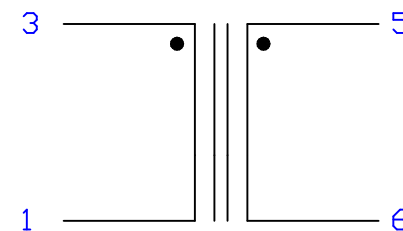


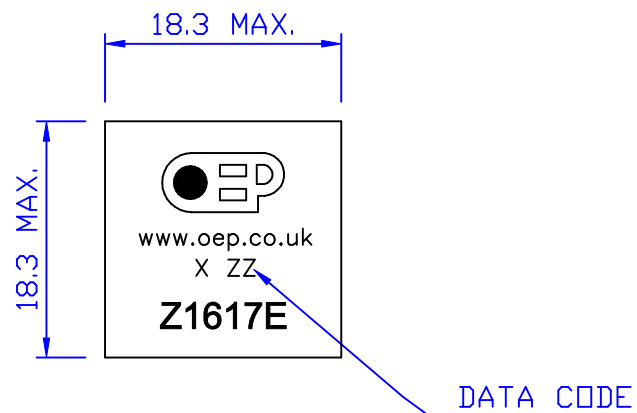

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 245 Ω HM $\pm$ 15%.
PIN 5-6 = 21.4 Ω HM $\pm$ 15%.
- INDUCTANCE (@0.27 Vrms, 100Hz) :
PIN 1-3 = 14.5 H MIN.
PIN 5-6 = 1 H MIN.
- IMPEDANCE (@0.27Vrms, 1KHz, 5-6 W/H 600 Ω HM) :
PIN 1-3 = 10 K Ω HM REF.
- TURN RATIO (@0.27 Vrms, 28KHz) :
PIN 3-1:5-6 = 4.07 $\pm$ 1%.
- HI-POT (@1.5KVAC, 1mA, 2SEC) :
PIN 1-6
- RoHS COMPLIANCE.

NOTE : DO NOT PASS DC CURRENT THROUGH WINDNGS.

						Atech®		TITLE TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. Z1617ER	
A	SPEC.	12/19/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	11/23/2005	BART	LYS	SUEDY	DATE 11/23/05		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW Pair	
REVISIONS									