
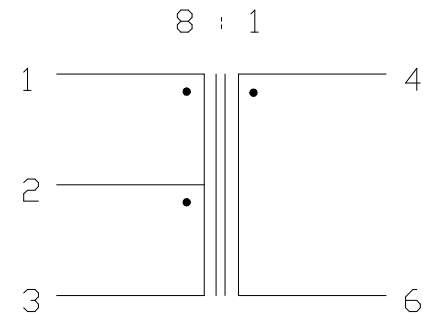
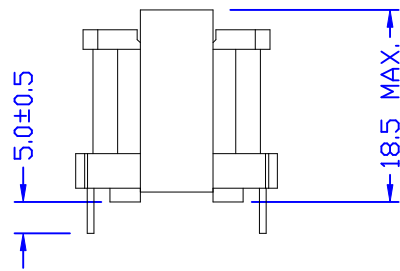
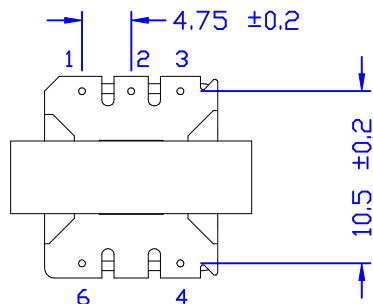





ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 51 Ω HM $\pm 15\%$.
PIN 2-3 = 51 Ω HM $\pm 15\%$.
PIN 4-6 = 4.7 Ω HM $\pm 15\%$.
- INDUCTANCE (@1KHz, 0.27 Vrms) :
PIN 1-2 = 0.38 H $\pm 20\%$.
PIN 2-3 = 0.38 H $\pm 20\%$.
PIN 1-3 = 1.43 H $\pm 20\%$.
PIN 4-6 = 29 mH $\pm 20\%$.
- TURN RATIO (@10KHz, 0.27 vrms) :
PIN 1-3:4-6 = 8 $\pm 1\%$.
PIN 1-2:2-3 = 1 $\pm 1\%$.
- HI-POT (@500VAC, 1mA, 2S)
PRI-SEC
WINDING-LAMINATIONS.
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 8: 1 MATCHING TRANSFORMER	
								DWG. NO. Z1902R	
	RELEASE	12/01/2005	BART	MICHAEL	SUEDY	UNITS:	SAFETY		SHEET 10F 1
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	12/01/05		DRAW
REVISIONS									<i>Pair</i>