
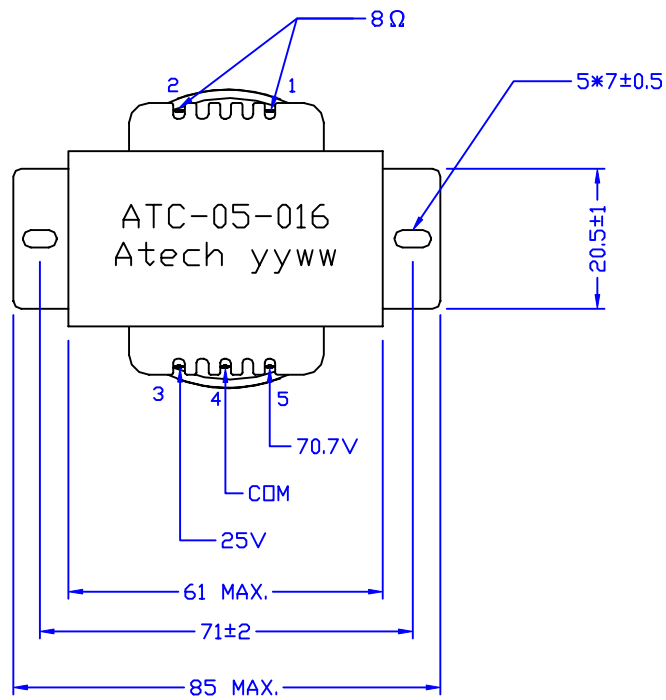


ELECTRICAL CHARACTERISTICS :

1. IMPERANCE RATIO <(1-2) LOAD 8Ω > (AT 1 KHz , 0.25 V) :
 (3-4) : $31.25 \Omega \pm 10\%$ (4-5) : $250 \Omega \pm 10\%$
2. DCR : (AT 25°C) :
 (1-2) : $0.34 \Omega \pm 10\%$ (3-4) : $1.6 \Omega \pm 10\%$
 (4-5) : $10.2 \Omega \pm 10\%$
3. HI-POT (AT 50 Hz 5 mA 1 MIN)
 P-S : 1.5 KV AC P-C : 1.5 KVAC
 S-C : 1.5 KV AC
4. INSULATION :
 PRI-SEC/PRI-CORE/SEC-CORE. $100 \text{ M OHM MIN. AT } 500 \text{ VDC}$

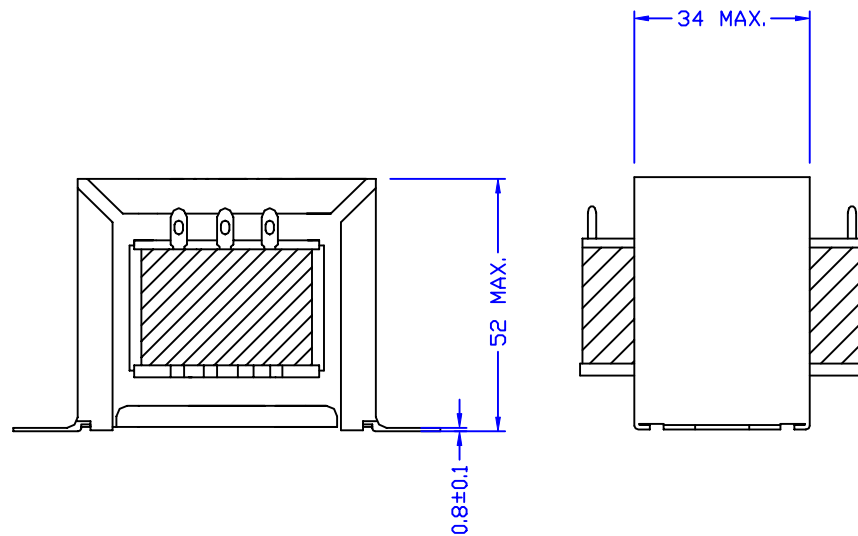

						Atech® Atech Technology Co., Ltd. TEL:02(2794-6667 FAX:02(2794-8004)		TITLE POWER TRANSFORMER	
								DWG. NO. ATC-05-016	
	RELEASE	04/28/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						04/28/05			