
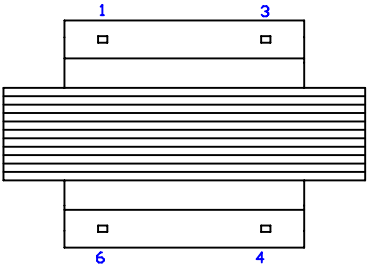


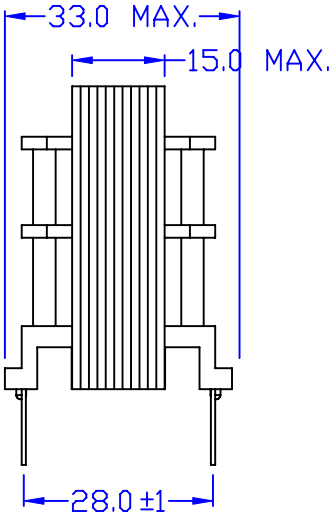


WHITE DOT PIN#1

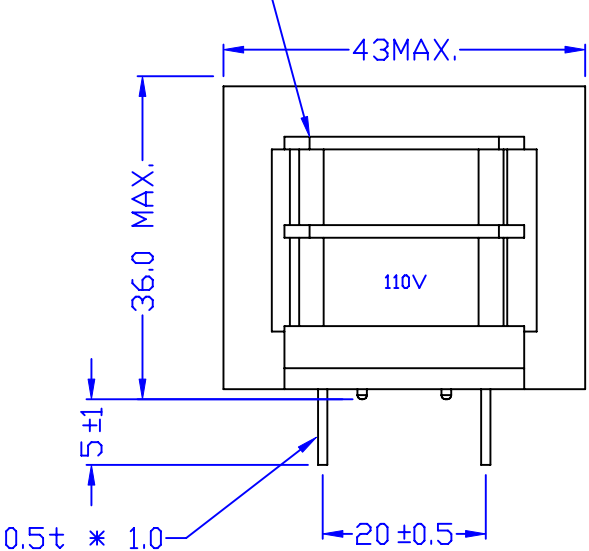

ELECTRICAL CHARACTERISTICS @25

- 1. PRIMARY RATED VOLTAGE AND FREQUENCY: 110V 60Hz
- 2. EXCITING CURRENT : INPUT PRIMARY 110V 60Hz 80mA MAX.
- 3. SECONDARY RATED VOLTAGE : INPUT VOLTAGE 110V 60Hz
COLOR/PIN NO. : 4-6
RATED VOLTAGE : 11.0V AC
RATED CURRENT : 0.6A+/-5%
NOLOAD VOLTAGE : 13.4V AC+/-5%
- 4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN, INPUT 50Hz LEAKAGE.
CURRENT 5mA/1 MIN.
1.5KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.5KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
0.5KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
- 5. INSULATION TEST: 500VDC 100M OHM MIN. BETWEEN WINDINGS AND WINDINGS AND CORE.
- 6. INSULATION CLASS: B

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE TRANSFORMER
						DWG. NO. ATC-06-009R		
RELEASE		03/06/2006	PAIR	AL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						03/06/06		