
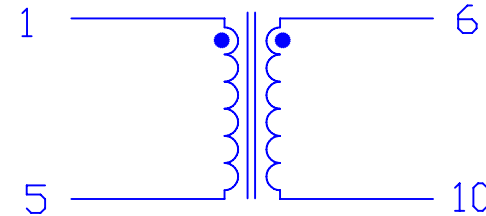
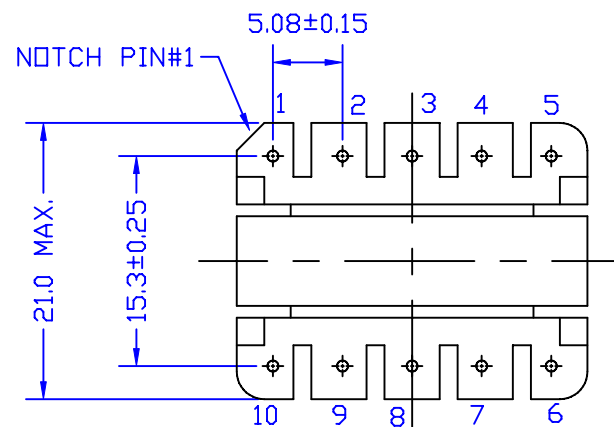


ATC-06-023R
Atech

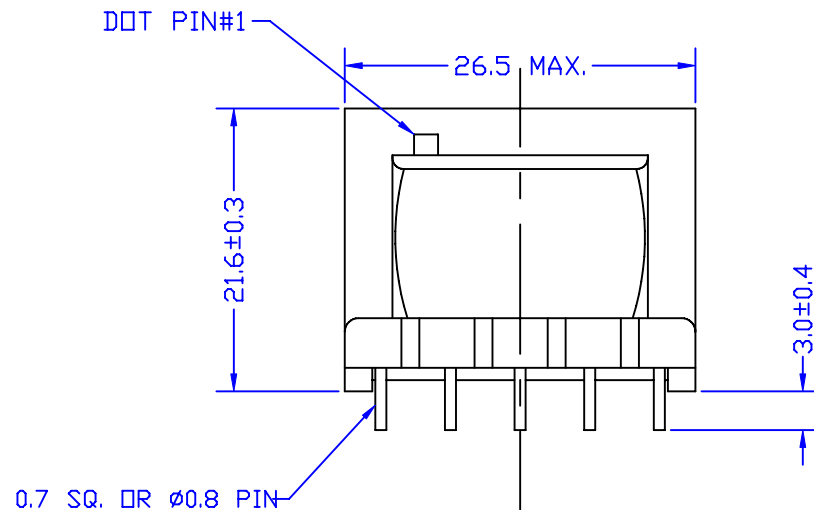

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = 3.3 OHM MAX. PIN 6-10 = 26 OHM MAX.
2. INDUCTANCE
(@1KHZ, 0.1Vrms, AL=OFF, SERIES) : PIN 1-5 = 210 mH MIN.
3. RETURN LOSS(@60m Vrms, 250 OHM LOAD) :
20HZ = 15dB MIN.
1KHZ = 15dB MIN.
10KHZ = 15dB MIN.
40KHZ = 7.0dB MIN.
4. INSERTION LOSS :(@200mVRMS, 250 OHM LOAD)
20 HZ = 2.0dB MAX.
1K HZ = 1.0dB MAX.
10K HZ = 1.0dB MAX.
40K HZ = 2.0dB MAX.
5. TURN RATION(@10KHZ, 0.1Vrms) 6-10 : 1-5 = 2.79+/-1%
6. HI-POT = (@1500 VAC, 1mA, 2SEC) : PRI - SEC
7. RoHS COMPLIANT

					Atech®		TITLE
					Atech Technology Co., Ltd.		TRANSFORMER
					TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
							ATC-06-023R
RELEASE	07/14/2006	PAIR	EUGENE	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS					DATE		DRAW
					07/14/06		Pair