
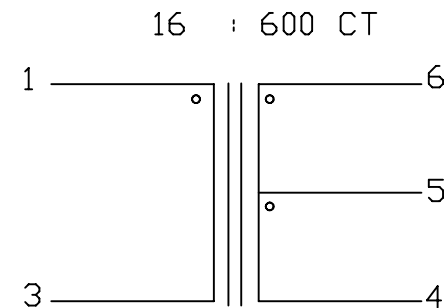


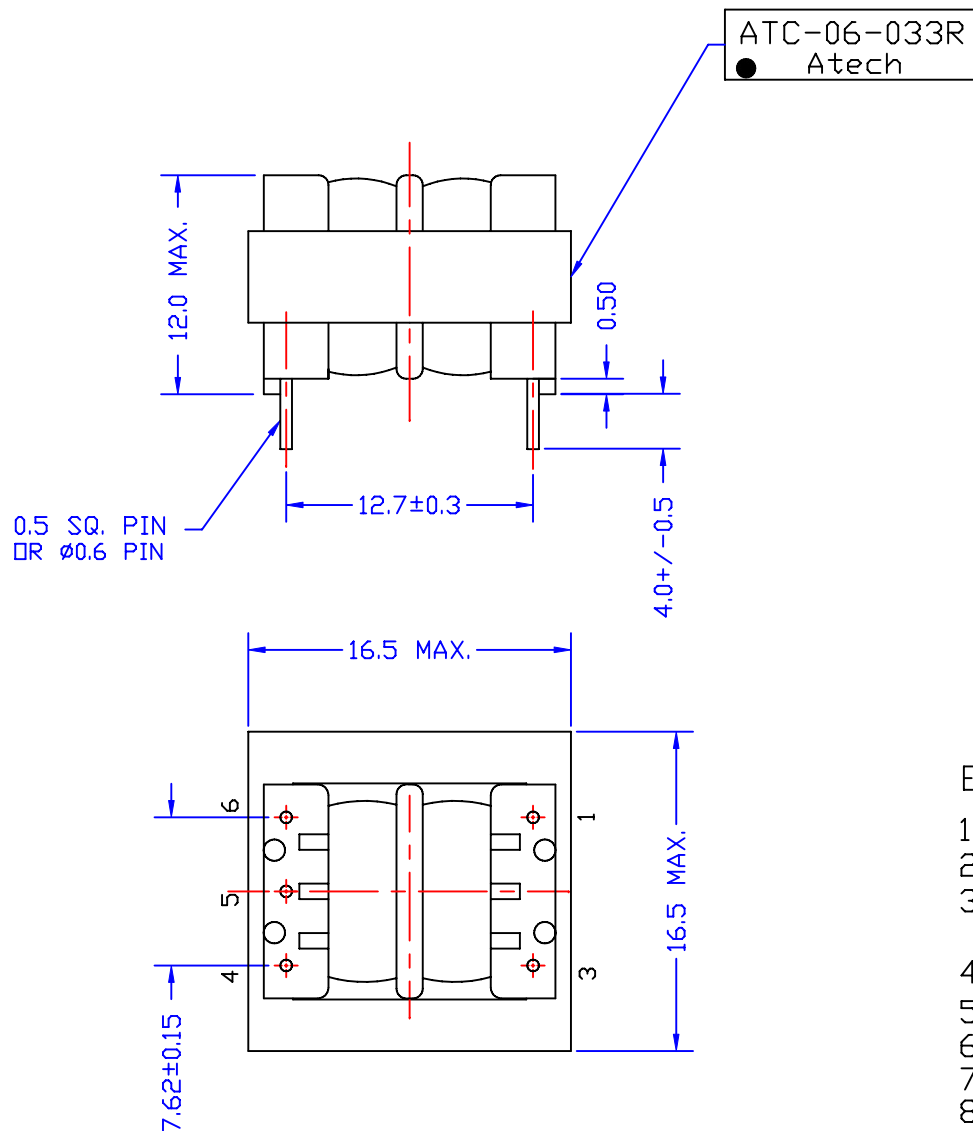

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 0.4 Ω HM MAX. PIN 4-6 = 14 Ω HM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) PIN 1-3 = 15mH MIN.
3. IMPEDANCE : (@1KHZ, 1Vrms, PIN 4-6 W/H 600 Ω HM)
PIN 1-3 = 16 Ω HM +/- 6%
4. INSERTION LOSS (@1KHZ) = 0.6 dB MAX.
5. RETURN LOSS (@300HZ ~ 4KHZ) = 19dB MIN.
6. FREQ RESP (REF. 1KHZ) @300 HZ = +/- 0.2dB
7. HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC
8. RoHS COMPLIANT

						Atech®		TITLE 16 : 600CT TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO. ATC-06-033R
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		
RELEASE	10/19/2006	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO: DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP01601CA	DRAW Pair	
REVISIONS						10/19/06		