
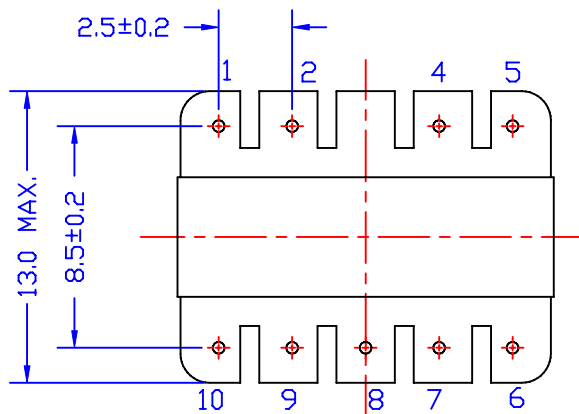
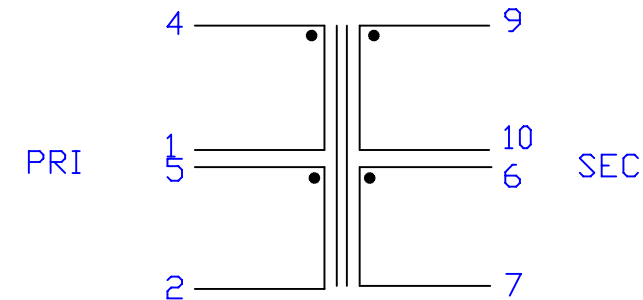


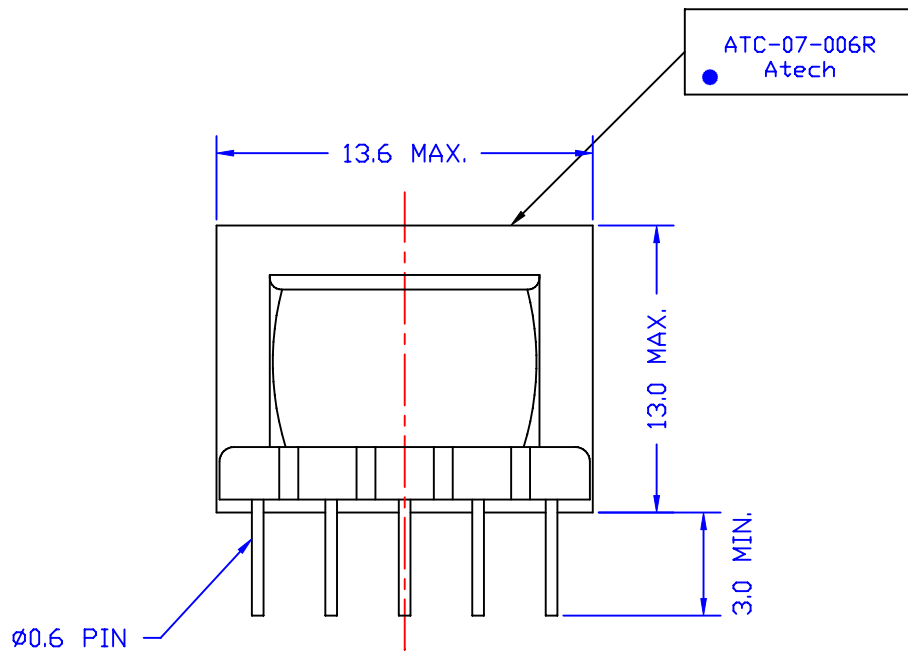

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 43 mΩ MAX., PIN 2-5 = 54m Ω MAX.
PIN 7-6 = 1100 mΩ MAX., PIN 10-9 = 1500 mΩ MAX.
- INDUCTANCE (@1KHz, 1Vrms.ALC OFF) : PIN 1-4 = 15.2uH±10%
PIN 2-5 = 15.2uH±10%
- LEAKAGE INDUCTANCE (@200KHz, 1Vrms.ALC OFF) :
PIN 6-10 (<7-9,1-2-4-5 SHORT) = 16uH MAX.
- TURN RATIO (@20KHz, 1Vrms) : PIN 6-7 : 4-1 = 4.62 ±3%
PIN 6-7 : 5-2 = 4.62 ±3% , PIN 6-7: 9-10 = 1 ± 3%
- HI-POT (@300VAC, 1mA, 2SEC) : PRI-SEC, PIN 6-10
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-07-006R	
	RELEASE	03/30/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/30/07			