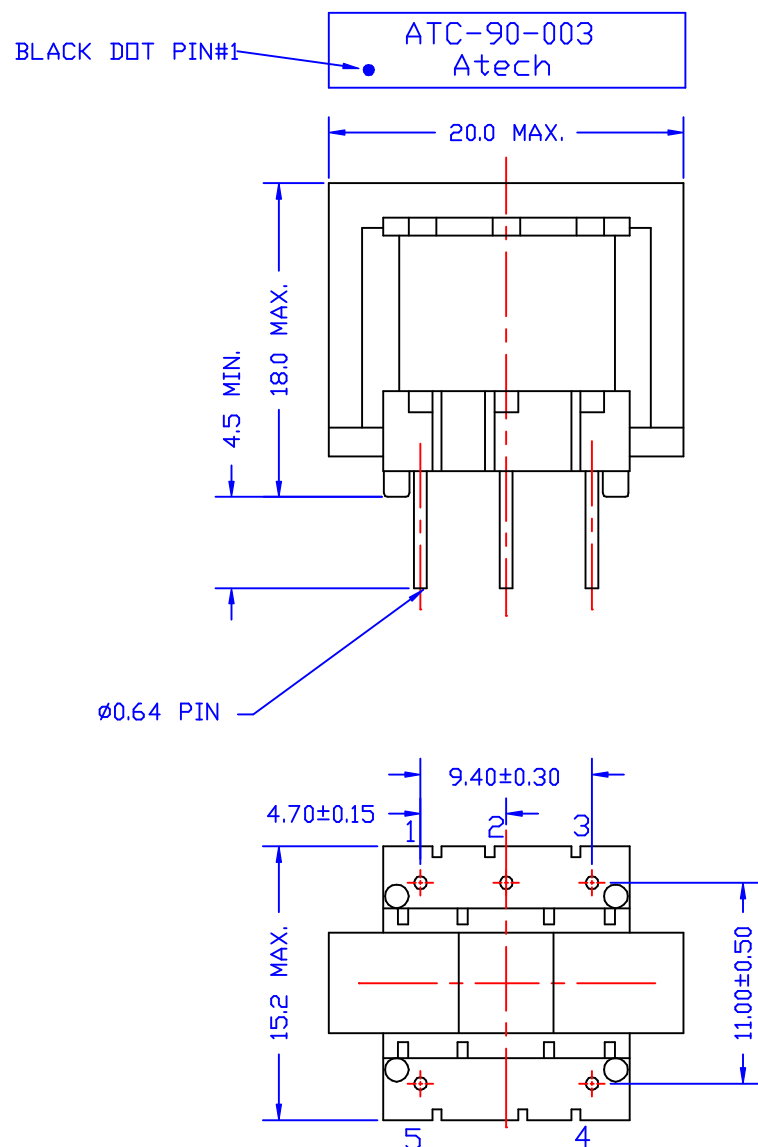


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 1200 Ω M+/-30% PIN 4-5 = 12 Ω M+/-30%
2. IMPEDANCE : (@1KHZ, 5Vrms, 4-5 W/H 150 Ω M)
PIN 1-3 = 130K Ω M+/-10%
3. INSERTION LOSS : (@1KHZ, 5Vrms, 4-5W/H 150 Ω M)
PIN 1-3 = 2.5dB MAX.
4. INTERWINDING CAP. (@1KHZ, 1Vrms)
PIN 1-5 = 80pF MAX.
5. THD.(@ 300HZ, 1Vrms) : 1% MAX.
6. TURNS RATIO (@1KHZ, 1Vrms) : PIN 1-3 : PIN 5-4 = 30+/-1%
PIN 2-3 : PIN 5-4 = 2+/-1%
7. HI-POT : (@ 500VAC, 1mA, 1MIN.) PRI.-SEC.-CORE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 130K/600: 150 TRANSFORMER	
							DWG. NO. ATC-90-003	
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS							DRAW <i>Pair</i>	