
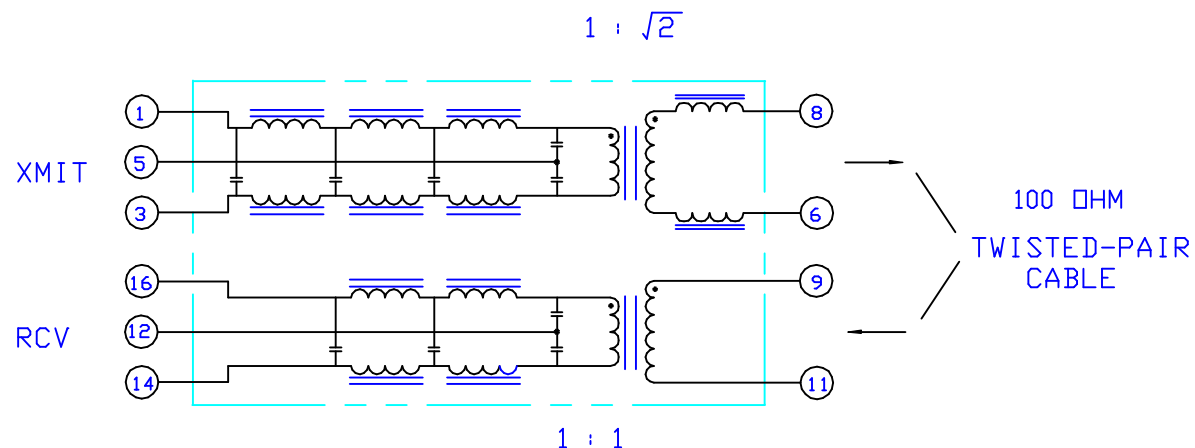
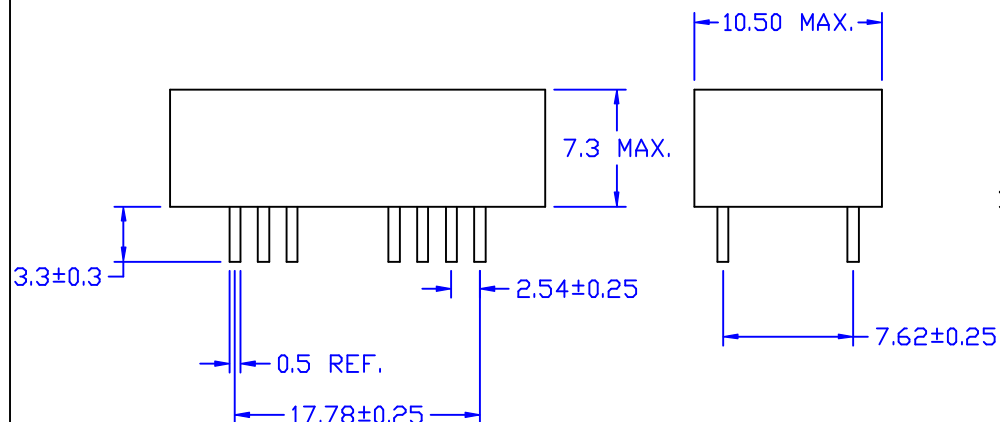


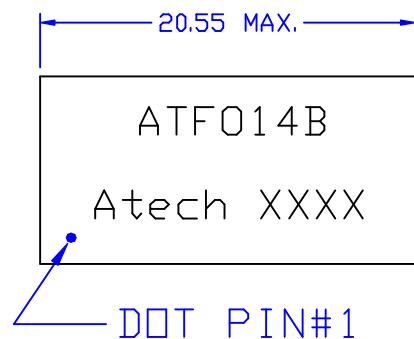

SPECIFICATIONS: (E2009 COMPATIBLE, IR REFLOWABLE 235±5°C,)

1. INSERTION LOSS(1-10 MHZ): -1.0dB MAX.
2. RETURN LOSS(5-10 MHZ): -15dB MIN.
3. CMRR (XMIT): @5 MHZ : -40dB MIN.
@10 MHZ : -35dB MIN.
@50-100 MHZ : -45dB MIN.
4. CROSSTALK (5-10MHZ): -35dB MIN.
5. ATTENUATION (XMIT):
@30 MHZ : -30dB MIN.
@40 MHZ: -27dB MIN.
@100 MHZ: -27dB MIN.
6. HI-POT TEST : 1500 Vrms

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 10 BASE-T L/P FILTER	
							DWG. NO. ATF014B	
	RELEASE	06/14/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/14/01		