


Q-TEC 981AB ADSL SPLITTER/FILTER

For more information : WWW.QTEC.INFO



ISDN SPLITTER/FILTER

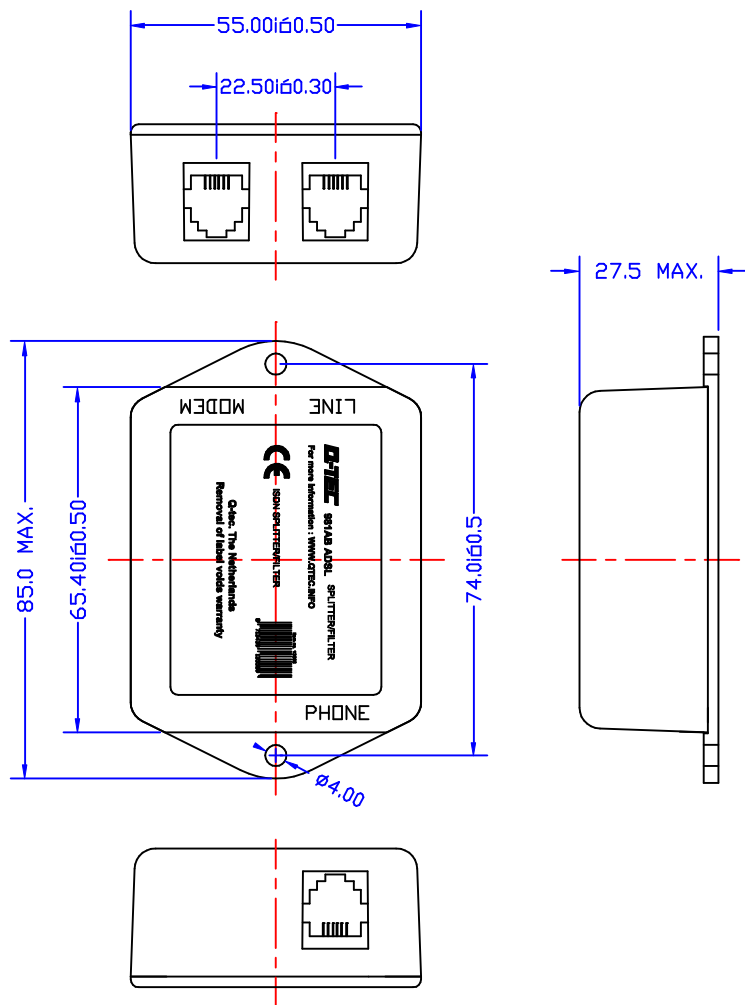

Q-tec. The Netherlands
Removal of label voids warranty

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. TIP TO RING DC VOLTAGE : 0-72V
3. LINE CURRENT : 0-100mA
4. ISDN SPLITTER BANDWIDTH : DC TO 80KHZ
5. ISDN PORT IMPEDANCE : 135 OHM
6. INSERTION LOSS (@200HZ~80KHZ) : 2dB MAX.
7. ATTENUATION (@160KHZ~1104KHZ) : 60dB MIN.
8. DELAY DISTORTION (@100HZ~80KHZ) : 200uSEC MAX.
9. RETURN LOSS (@1KHZ~60KHZ) : 16dB MIN.
(@60KHZ~80KHZ) : 10dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE		ADSL ISDN SPLITTER	
								DWG. NO.		ATF033BT	
	RELEASE	04/02/2003	PAIR	SIMON	SUEDY	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW			
REVISIONS						04/02/03				Pair	