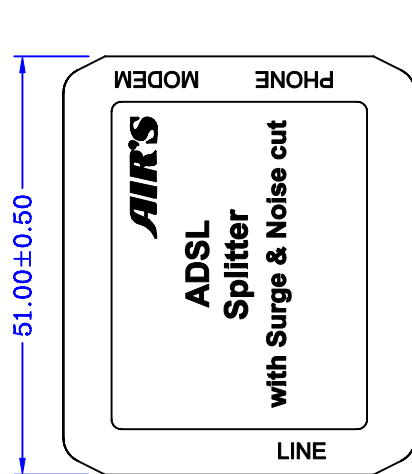
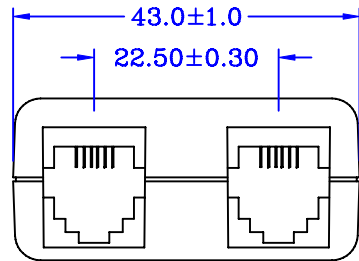


ELECTRICAL CHARACTERISTICS :

1. MEET ANNEX E OF ITU-T REC.G.992.1
2. DCR EACH LINE : 20 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 3.5KHZ TYP.
4. INSERTION LOSS : @1KHZ = 0.5dB MAX.
5. ATTENUATION (@20KHZ & ABOVE) : 60dB TYP.
6. RETURN LOSS (@1KHZ) : 12dB MIN.
7. LONGITUDINAL BALANCE (@200~4KHZ) : 53dB MIN.
8. COMMON MODE REJECTION (@40KHZ) : 55dB MIN.
(@1.1MHZ) : 25dB MIN.
9. DELAY DISTORTION (@200~4KHZ) : 150uSEC MAX.
10. POTS LOOP CURRENTS : 120mA
11. POTS TIP TO RING DC VOLTAGE 0-200V
12. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150Vrms

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-8887 FAX: (02) 2794-8004		TITLE	ADSL POTS SPLITTER
								DWG. NO.	ATF043A
A	43.0±1.0	03/25/2003	PAIR	AL	SUEDY	UNITS:		SAFETY	SHEET 1 OF 1
	RELEASE	02/17/2003	DOLLY	SUEDY	SUEDY	M/M			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	p/n:	DRAW	
REVISIONS						02/17/03	CSA060001A	Pair	