

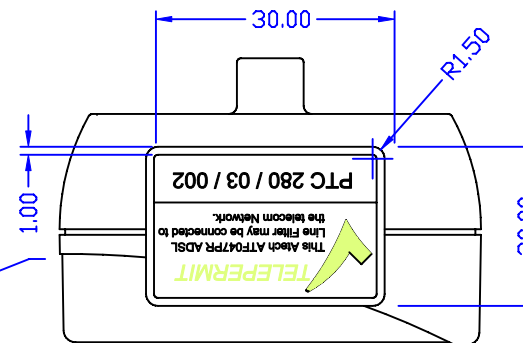
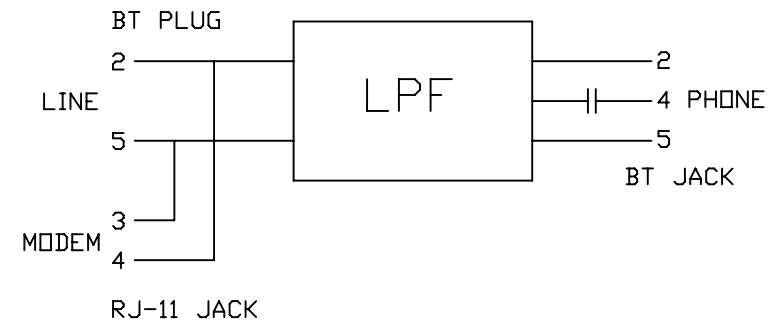
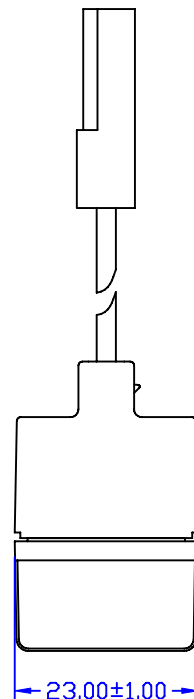


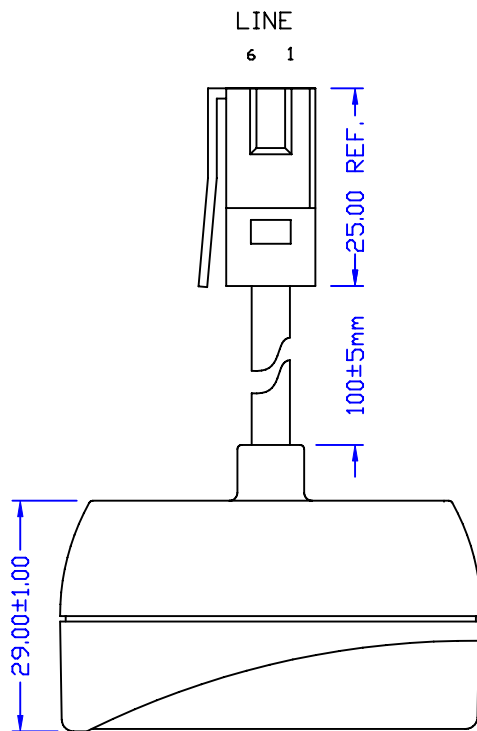

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@REF ZBT3, 300HZ-3.4KHZ) : 12dB MIN.
(@REF ZN, 300HZ-3.4KHZ) : 12dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.
7. RoHS COMPLIANT

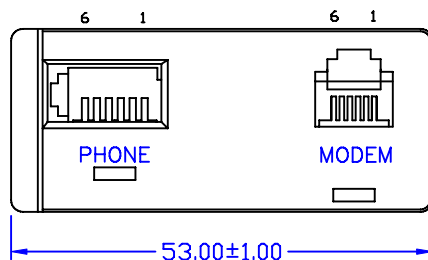

						Atech®		TITLE MICRO FILTER FOR UK	
						Atech Technology Co. Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATF047PR	
RELEASE		11/07/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/07/06		DRAW Pair	