
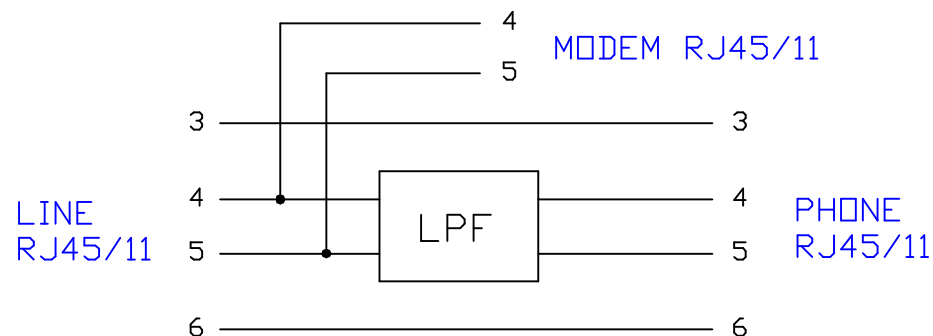


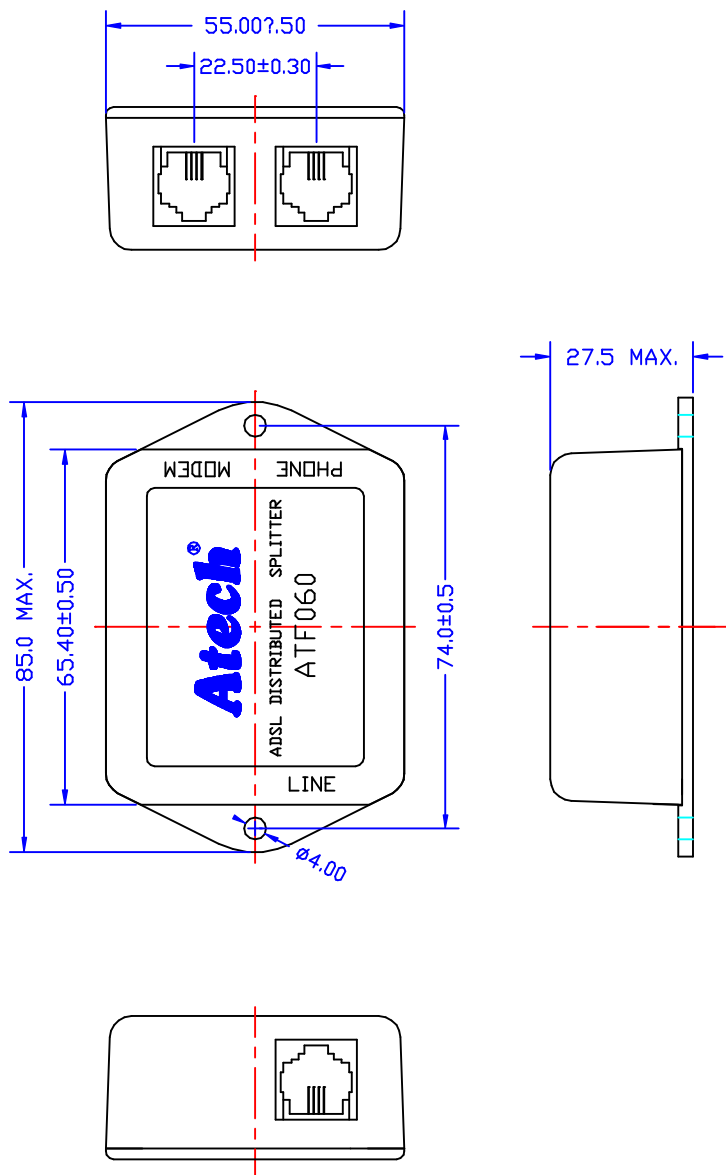

ELECTRICAL CHARACTERISTICS : MEET ETSI TR 101728

1. FOR COMPLEX IMPEDANCE : 270 OHM + (750OHM // 150nF)
2. DCR EACH LINE (@20mA TO 80mA) : 50 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 1dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ-4KHZ) : ± 1dB
5. RETURN LOSS LINE&PHONE PORT (@300HZ-3.4KHZ) : 12dB MIN.
(@3.4KHZ-4KHZ) : 8dB MIN.
6. LONGITUDINAL BALANCE (@50HZ-600HZ) : 40dB MIN.
(@600HZ-3.4KHZ) : 46dB MIN.
7. ATTENUATION (@32KHZ-1.1MHZ) : 55dB MIN.
8. ISOLATION (@T-R) : 25M OHM MIN.(@100 VDC)
(@T-G, R-G) : 100M OHM MIN.(@100 VDC)
9. LOOP CURRENT : 80mA

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004	TITLE ADSSL DISTRIBUTED SPLITTER	
A	ELECTRICAL	09/10/2003	RORY	EUGENE	SUEDY		DWG. NO. ATF060	
	RELEASE	04/09/2003	DOLLY	SIMON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/09/03		