
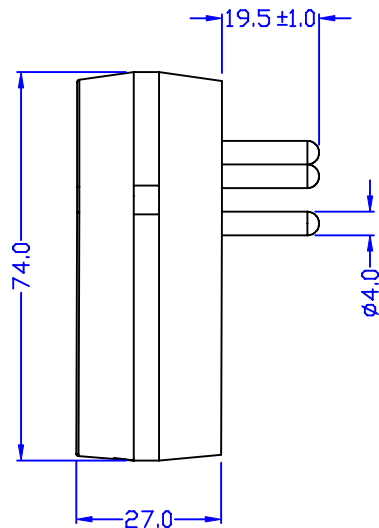
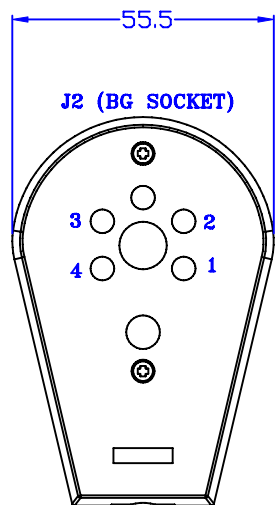


ELECTRICAL CHARACTERISTICS :

1. POTS PORT IMPEDAMCE : 600 OHM
2. INSERTION LOSS 1004HZ : 1.0 dB MAX.
3. VOICE BAND ATTENUATION 0.2~4KHZ : +/-1dB MAX.
4. ADSL BAND ATTENUATION 30KHZ : 24dB MIN.
1MHZ : 55dB MIN.
5. DCR :(TIP-J2 TO TIP-J1& RING-J2 TO RING-J1)≤50 OHM
6. INSULATION RESISTANCE TIP TO RING : >25M OHM
7. RETURN LOSS : SRL-L >22dB
ERL >22dB
SRL-H >10dB

8. RoHS COMPLIANT

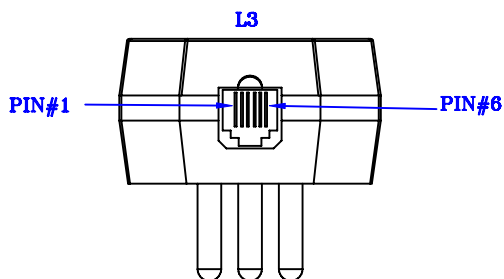

CONNECTOR	FUNCTION	STYLE	TIP	RING
J3	DSL	RJ11	PIN3	PIN4
J2	PHONE	SOCKET	PIN1	PIN2
J1	LINE	PLUG	PIN1	PIN2

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE CPE SIDE ADSL POTS SPLITTER	
B	j1 & j2 CHANGE	07/06/2006	PAIR	MIC		EUGENE	DWG. NO.
A	CHANGE CASE	06/06/2006	PAIR	MIC	EUGENE	ATF104R	
	RELEASE	04/19/2006	PAIR	MIC	EUGENE	UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1
REVISIONS						04/19/06	DRAW <i>Pair</i>