

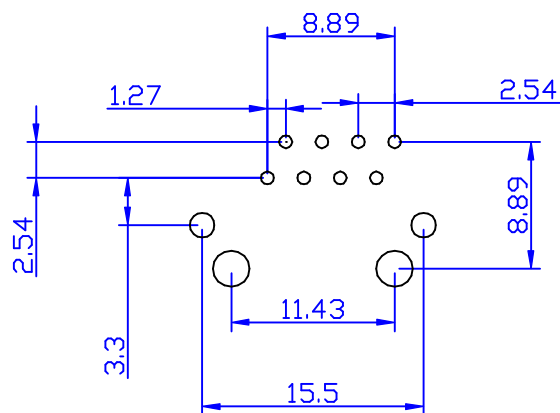


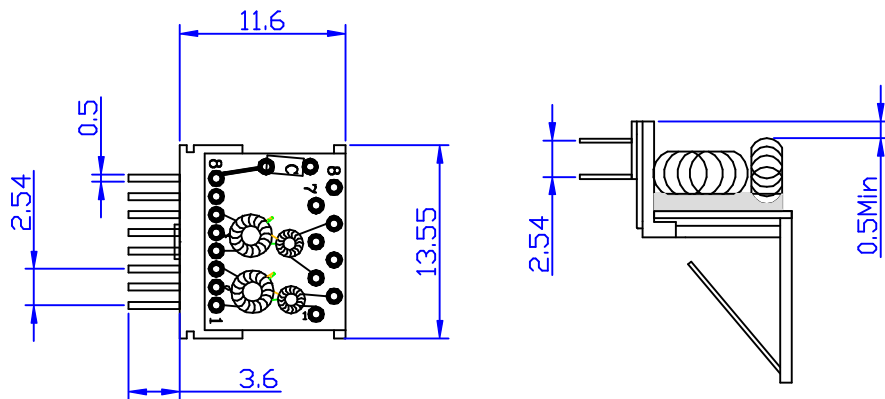

PCB LAYOUT MOUNTING HOLE (TOP VIEW)

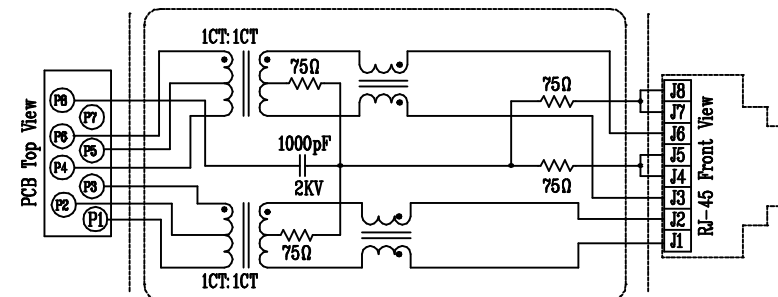

ELECTRICAL CHARACTERISTICS :

1. DCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 μ H MIN.
2. DCR : P1-P3, J1-J2, J3-J6 = 1.0 Ω M MAX.
P4-P6 = 1.2 Ω M MAX.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS :
1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -10 dB MIN.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT $\pm$ 3%.
8. CMRR : 1~100 MHZ = -30 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

					Atech® Atech Technology Co., Ltd. TEL:02(2794-6667 FAX:02(2794-8004	TITLE LAN-MATE		
						DWG. NO. ATM-088		
	RELEASE	03/03/2005	BART	AL	SUEDY	UNITS: mm	SAFETY	SHEET OF
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/03/05	DRAW <i>Pair</i>	
REVISIONS								