
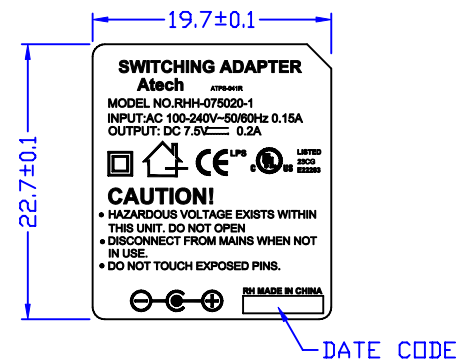


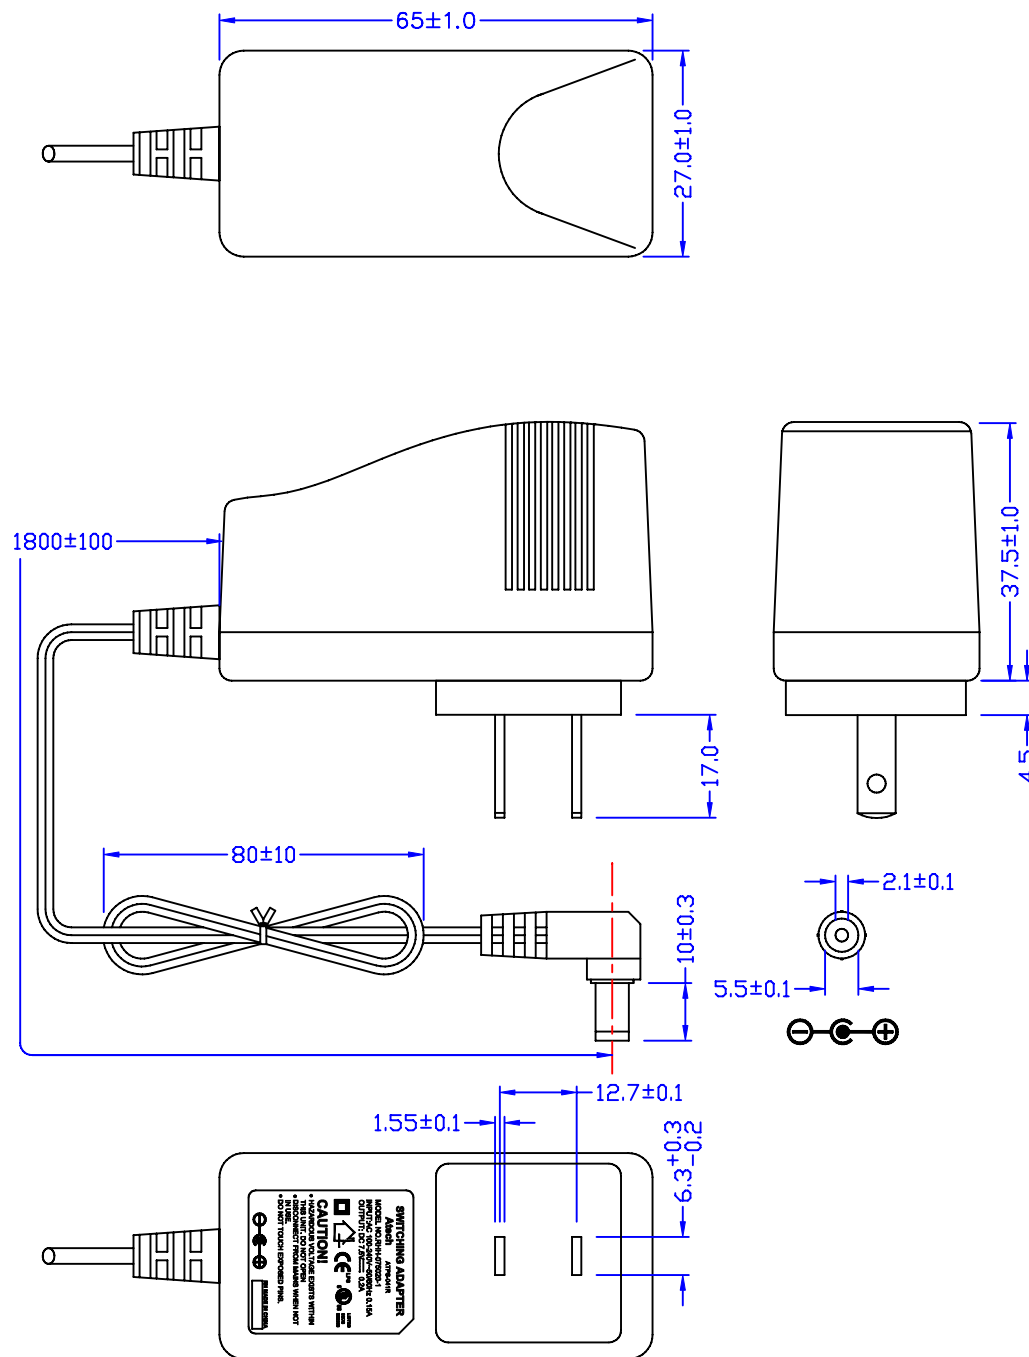

ELECTRICAL CHARACTERISTICS:

1. INPUT : AC90-264V
2. FREQUENCY : 47HZ-63HZ
3. INRUSH CURRENT : 50A MAX.
4. LEAKAGE CURRENT : 0.25mA MAX.
5. RETED OUTPUT : DC7.5V
6. RATED LOAD : 0.2A
7. LOAD/LINE REGULATION : $7.5V \pm 5\%$
8. RIPPLE&NOISE VOLTAGE : 100mVp-p
9. OUTPUT SHORT PROTECTION : SHORT BE REMOVE NO DAMAGE
10. OVER VOLTAGE PROTECTION : ZENER SHORT PROTECTION
11. HOLD UP TIME : 5mS TYP.
12. RoHS COMPLIANCE

						Atech®		TITLE Switching Power Supply	
						Atech Technology Co. Ltd.		DWG. NO. ATPS-041R	
						UNITS: M/M		SAFETY	
						DATE		SHEET 1 OF 1	
REVISIONS						08/30/06		DRAW Pair	
NO.	DESCRIPTION	DATE	BY	CHK	APPD				
	RELEASE	08/30/2006	PAIR	AL	EUGENE				