
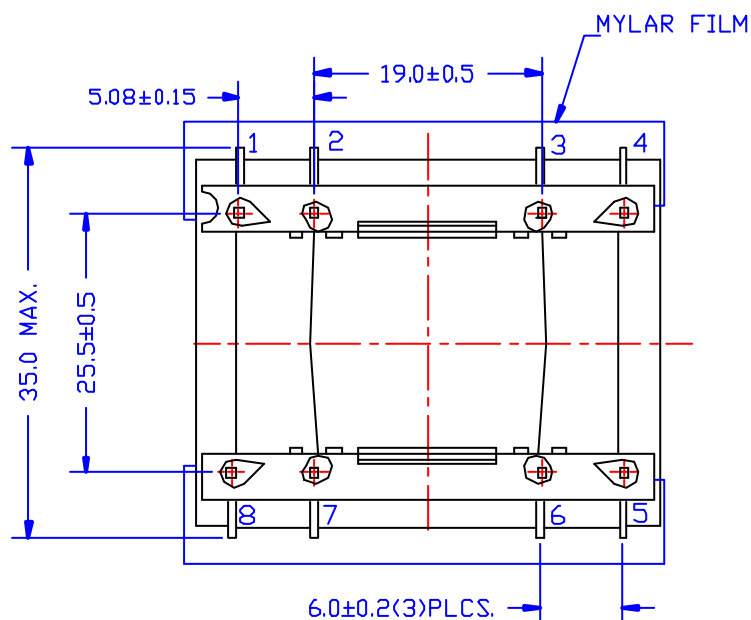
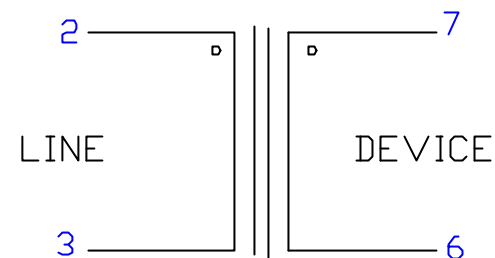


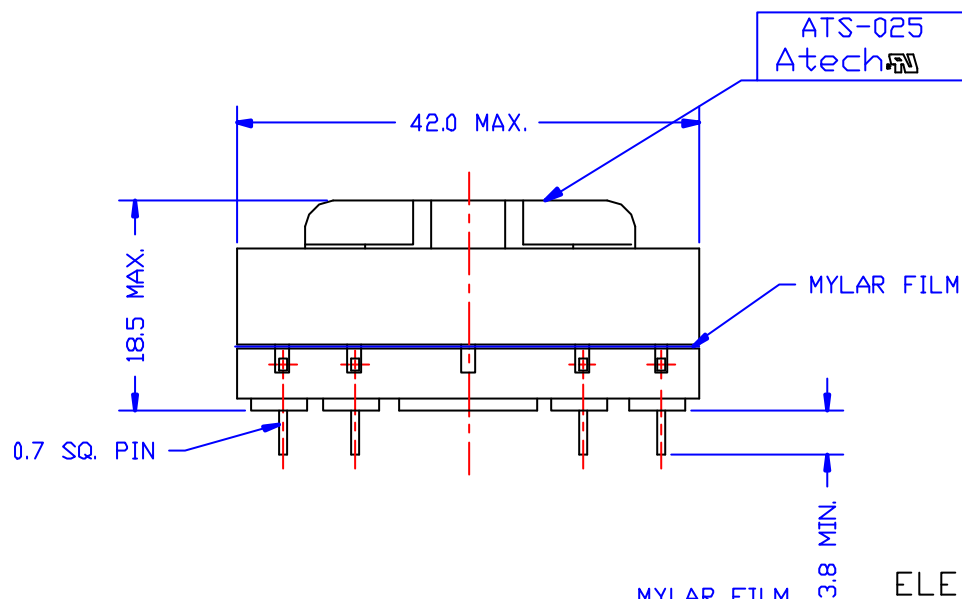

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 2-3 = 105 OHM MAX, PIN 6-7 = 90 OHM MAX.
2. INDUCTANCE : (@1KHZ, 1Vrms, W/H 80 mADC) PIN 2-3 = 450mH MIN.
3. IMPEDANCE : (@1KHZ, 1Vrms, PIN 2-3 W/H 80mADC, PIN 6-7 W/H 600OHM LOAD) PIN 2-3 = 600OHM +/-10%.
4. INSERTION LOSS : (@1KHZ, 1Vrms, PIN 2-3 W/H 80mADC PIN 6-7 W/H 600OHM LOAD) 2.0db MAX.
5. FREQ. RESP. : (REF. 1KHZ) @300HZ = +/-0.5db
@4KHZ = +/-0.2db
6. RETURN LOSS : (PIN 2-3 W/H 80mADC, PIN 6-7 W/H 600OHM LOAD, REF. 600OHM) @300HZ = 14db MIN.
@1KHZ = 20db MIN. @3.4KHZ = 17db MIN.
7. THD : (@300HZ, 1Vrms PIN 2-3 W/H 80mADC, PIN 6-7 W/H 600OHM LOAD) -50db MAX.
8. POLARITY : PIN 2 & 7 INPHASE
9. HI-POT : (@3750 VAC, 1mA 1MIN.) PRI.-SEC.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-025
RELEASE		PAIR	SUEDY	UNITS	SAFETY		SHEET 1 OF 1	
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						E159603		