
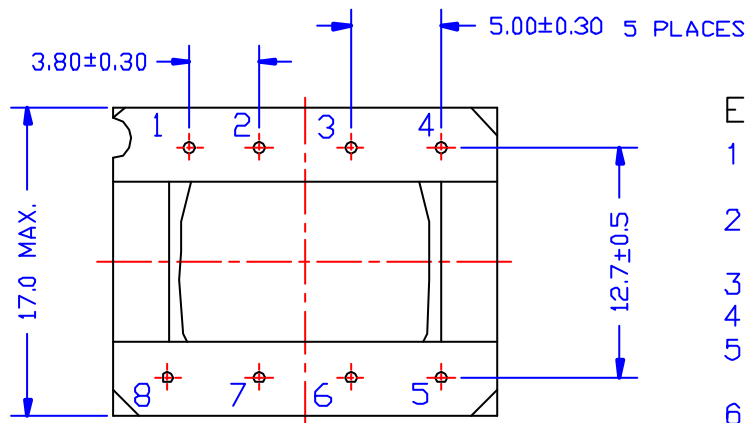



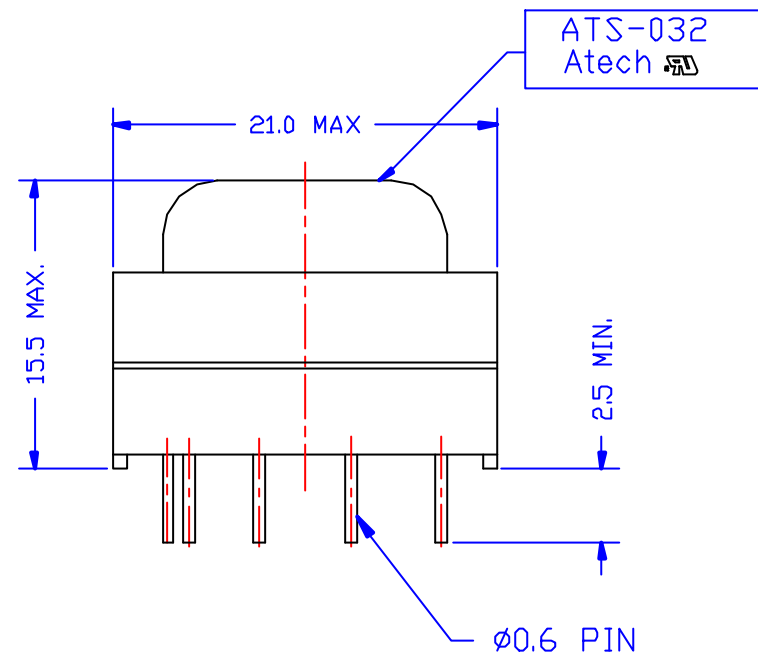

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-2 = 3-4 = 7.0 OHM $\pm$ 15%
PIN 5-6 = 790 mOHM MAX. PIN 7-8 = 650 mOHM MAX.
- 2 INDUCTANCE (@5KHZ, 1Vrms, W/H 90mA DC.)
PIN 1-2 = 3-4 = 3.2 mH MIN.
- 3 HI-POT = 100 VAC, 1mA, 1MINUTE (W1-W2-W3-W4)
- 4 TURN PATIO : PIN 1-2 : 3-4 : 6-5 : 8-7 = 1:1:2:2
- 5 Z :(@5KHZ, 1Vrms W/H 90mADC PIN 6-7 SHORT)
PIN 5-8 : 1-2=50 OHM $\pm$ 10% : 50 OHM
- 6 INTERWINDING CAPACITANCE :(@5KHZ, 1Vrms)
PIN 1-8 = 600pF $\pm$ 30% PIN 4-5 = 700pF $\pm$ 30%
PIN 1-3 = 800pF $\pm$ 30%

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-032
RELEASE		PAIR		SLEEDY		UNITS	SAFETY	
						M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						E159603		SHEET 1 OF 1
						DRAW		Pair