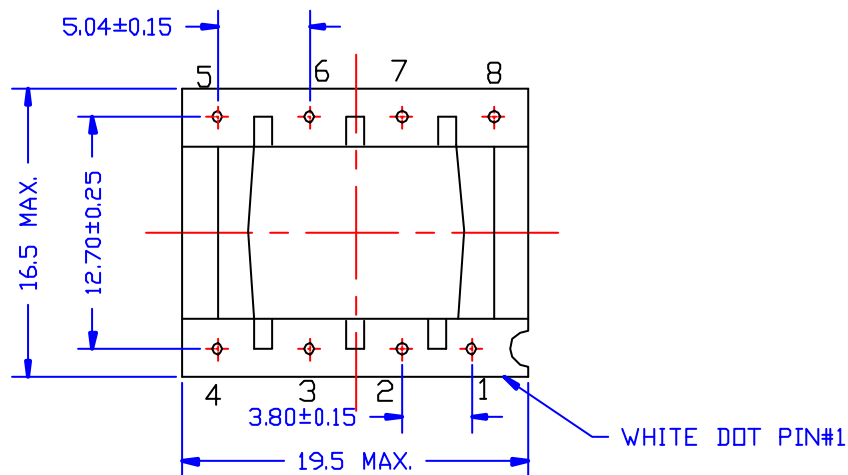
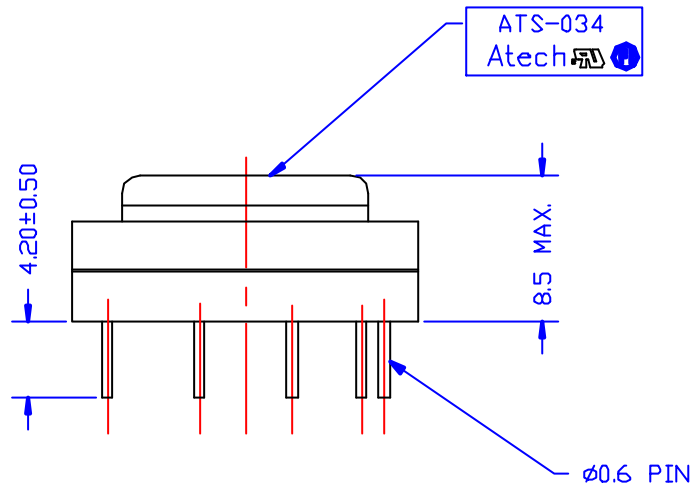


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 2-3 = 43 OHM MAX.
PIN 6-7 = 53 OHM MAX.
- 2 INDUCTANCE : (@ 1KHZ, 1Vrms) PIN 2-3 = 470mH $\pm$ 20%
- 3 IMPEDANCE = (1KHZ, 1Vrms, PIN 6-7 W/H 600OHM LOAD)
PIN 2-3 = 600 OHM $\pm$ 10%
- 4 INSERTION LOSS : (@ 1KHZ, 1Vrms, 6-7 W/H 600 OHM LOAD)
= 1.2 dB MAX.
- 5 FREQ. RESP = (REF.1KHZ) @ 300HZ = $\pm 0.40 \text{ dB}$
@ 3.4KHZ = $\pm 0.35 \text{ dB}$
- 6 RETURN LOSS : @ 300HZ = 19dB MIN. @ 1KHZ = 24dB MIN.
@ 3.4KHZ = 25dB MIN.
- 7 LONGITUDINAL BALANCE = 65dB MIN (AT 3.4KHZ)
- 8 T.H.D. : (@ 300HZ, -10dBm) = -65dB MAX.
- 9 HI- POT (@ 3750 VAC, 1mA, 2SEC.) LINE - DEVICE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-8887 FAX: (02) 2794-8884	TITLE 600: 600 TRANSFORMER		
							DWG. NO. ATS-034		
	RELEASE		PAIR		SUEDY	UNITS M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	FI 504		
REVISIONS							E159603		DRAW <i>Pair</i>