
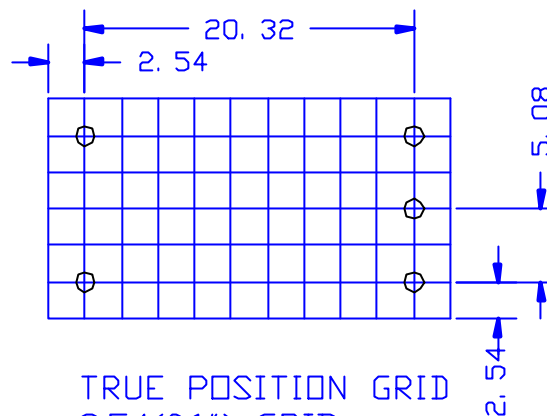
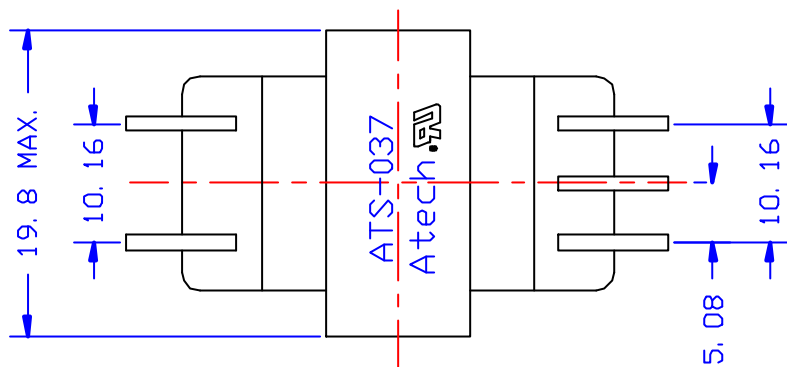
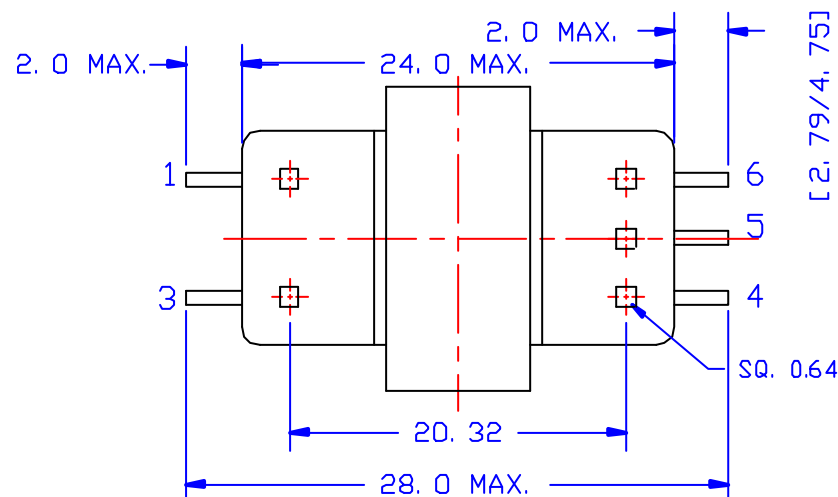


TRUE POSITION GRID
2.54(0.1) GRID

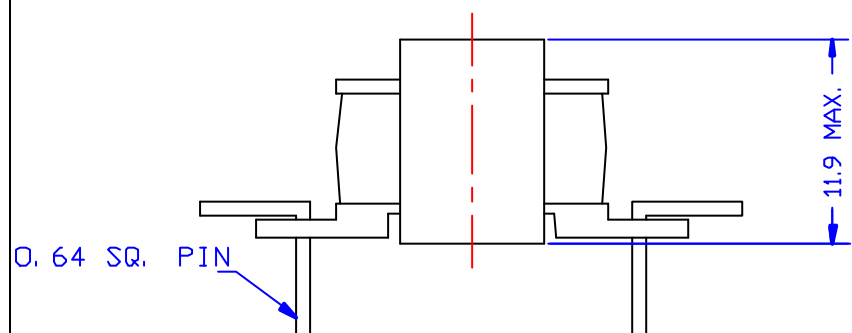

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH 671-1538)

1. D. C. R. : PIN 1-3 = 45 OHM $\pm$ 10%
PIN 6-4 = 45 OHM $\pm$ 10%
2. INDUCTANCE : (@1KHZ, 1Vrms) PIN 3-1 = 4.2H $\pm$ 30%(PARALLEL)
3. LEAKAGE INDUCTANCE : (@1KHZ, 1Vrms W/H PIN 6-4 SHORT)
PIN 3-1 = 2.62mH $\pm$ 15%
4. IMPEDANCE : (@1KHZ, 1Vrms PIN 4-6 W/H 530OHM)
PIN 1-3 = 600OHM $\pm$ 10%
5. RETURN LOSS : (REF. 600OHM, PIN 6-4 W/H 530OHM)
@300HZ = 26db MIN. @1KHZ = 26db MIN.
@3KHZ = 26db MIN.
6. INSERTION LOSS : (@1KHZ, 1Vrms, PIN 6-4 W/H 530 OHM)
0.85db MAX.
7. FREQ. RESPONSE : (REF. 1KHZ, 1Vrms PIN 6-4 W/H 530OHM) @300HZ = $\pm$ 0.2db @3KHZ = $\pm$ 0.2db
8. LONGITUDINAL BALANCE : 200HZ-1KHZ 60db MIN.
1KHZ-4KHZ 40db MIN.
9. TURN RATIO : (@8KHZ, 1Vrms) PIN 6-4 : 3-1 = 1 $\pm$ 1%
10. DISTORTION : 300HZ +4.7dbm : -71db MAX.
11. HI-POT : (1500 VAC, 1mA, 1MIN.) PIN1-4
12. CORE LOSS : (@1KHZ, 1Vrms) = 40K OHM

D	INDUCTANCE	12/26/97				Atech Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600 : 530 TRANSFORMER	
C	DELETE 14.0 MAX.						DWG. NO. ATS-037	
B	PIN NO.					UNITS M/M	SAFETY	
	RELEASE		PAIR		SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1 DRAW Pair	
REVISIONS						07/13/95		

E159603