
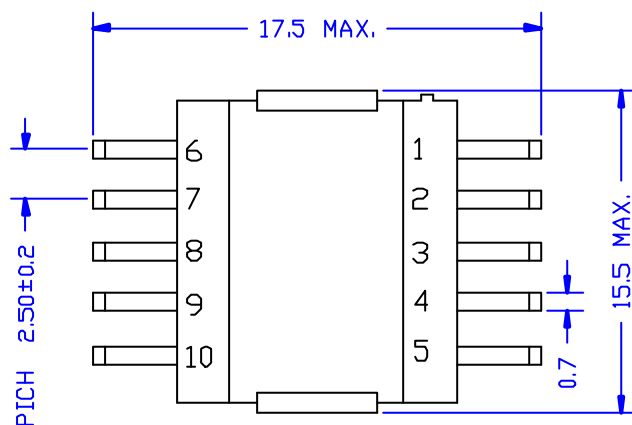
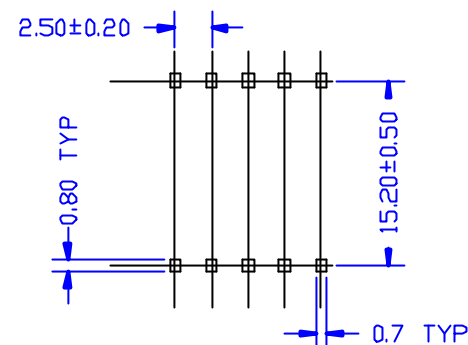


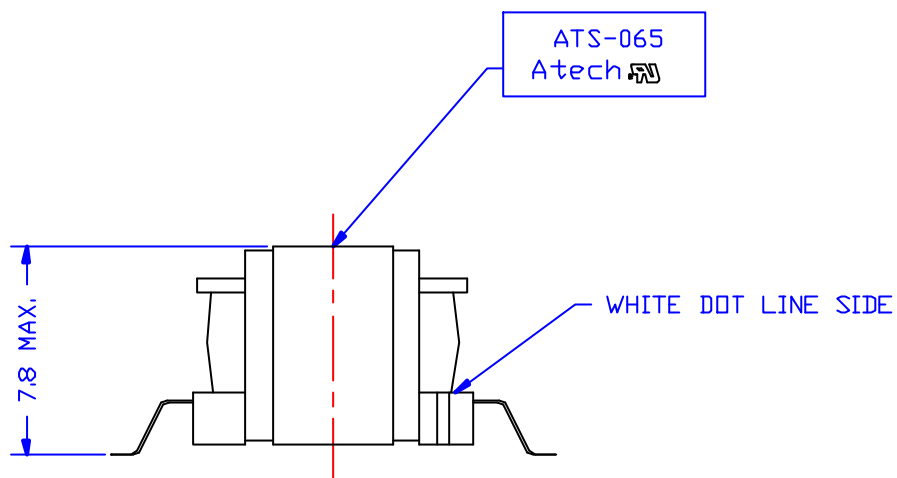

ELECTRICAL CHARACTERISTICS: (671-8258 COMPATIBLE)

1 IMPEDANCE : DESIGNED TO REFLECT 600 OHM $\pm$ 10% ON LINE WITH
445 OHM ON DEVICE

2 TURNS RATIO : 1 : 1 $\pm$ 1%

3 D.C CURRENT : NONE

4 DCR : LINE = 63 OHM $\pm$ 10%, DEVICE = 86 OHM $\pm$ 10%

5 INDUCTANCE : 1.1 H MIN.(@1KHZ, 0.78Vrms)

6 INSERTION LOSS (@1KHZ, 0dBm, W/H 445 OHM LOAD): 1.4dB MAX.

7 FREQ. RESP. (REF. 1KHZ) : @300HZ = $\pm$ 0.2dB

@4KHZ = $\pm$ 0.05dB

8 RETURN LOSS(REF. 600 OHM) : @300HZ = 21dB MIN.

@1KHZ = 26dB MIN.

@3.4KHZ = 25dB MIN.

9 LONGITUDINAL BALANCE, REF FCC PART 68 : 60dB MIN.(200HZ TO 4KHZ)

10 T.H.D. : -60dB MAX.(@300HZ, 0dBm)

11 HI-POT : 1500VAC, 1mA, 1 MINUTE. PRI-SEC

						Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-8887 FAX:(02)2794-8884	TITLE TRANSFORMER	
							DWG. NO. ATS-065	
	RELEASE		PAIR		SUEDY	UNITS M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						E159603 		DRAW <i>Pair</i>

E159603