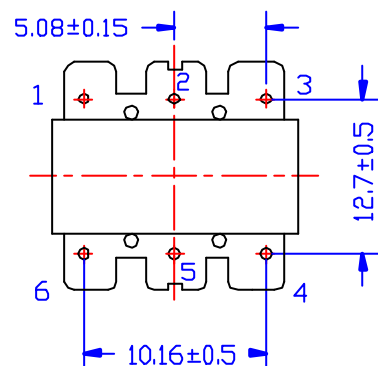
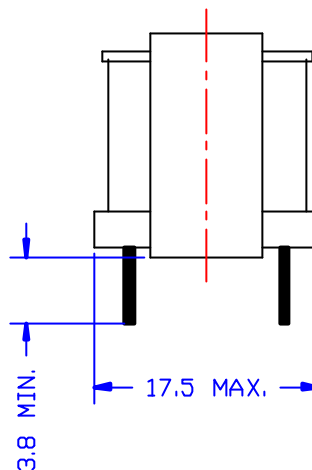
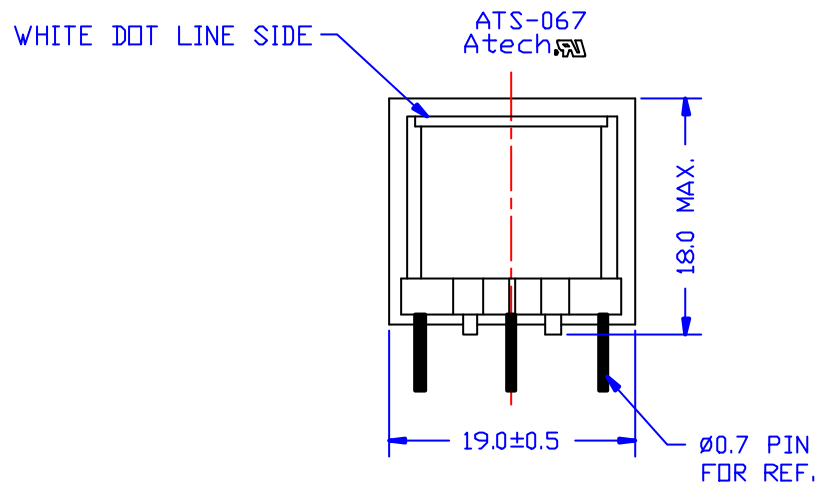


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 40 OHM MAX. PIN 4-6 = 50 OHM MAX.
- 2 INDUCTANCE : (@1KHZ, 1Vrms) PIN 1-3 = 1.0H MIN.
- 3 IMREDANCE : (@1KHZ, 1Vrms, PIN 4-6 W/H 600 OHM) PIN 1-3 = 600 OHM +/-10%
- 4 INSERTION (@1KHZ, 1Vrms, PIN 4-6 W/H 600 OHM) = 0.6±0.2dB
- 5 FREQ. RESP.(REF.1KHZ)@300HZ = +/-0.2db
@4KHZ = +/- 0.2db
- 6 RETURN LOSS : (PIN 4-6 W/H 600 OHM, REF. 600 OHM)
@300HZ = 26 db MIN.
@1KHZ = 26 db MIN.
@3400HZ = 26 db MIN.
- 7 HI-POT(@1500VAC, 1mA 1MINUTE): LINE-DEVICE-CORE

						Atech [®]		TITLE 600CT : 600CT TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-067	
						TEL (02)2794-8887 FAX (02)2794-8804			
RELEASE		PAIR		SLEDY		UNITS M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						E159603		DRAW Pair	