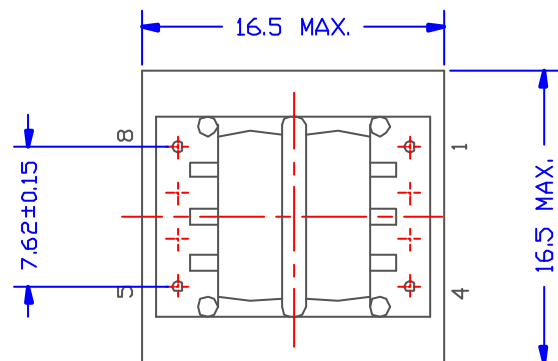
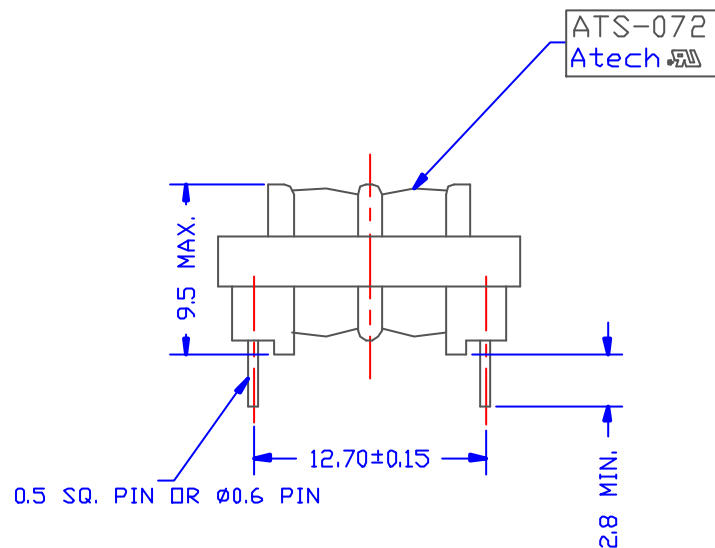


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R : PIN4-1 =26 OHM MAX. PIN 5-8 = 26 OHM MAX.
- 2 INDUCTANCE :(@1KHZ, 1Vrms) PIN 4-1 = 435 mH MIN
- 3 IMPEDANCE : (@1KHZ, 1Vrms, PIN 5-8 W/H 600 OHM LOAD)
PIN 4-1 = 600 OHM +/-10%
- 4 INSERTION LOSS :(@1KHZ, 1Vrms, PIN 5-8 W/H 600 OHM LOAD)
1.0 dB MAX.
- 5 FREQ. RESP. : (REF. 1KHZ)@300HZ = +/-0.4dB
@4KHZ = +/- 0.1dB
- 6 RETURN LOSS : (REF. 600 OHM)@300HZ = 20dB MIN.
@1KHZ = 23dB MIN. @4KHZ = 20dB MIN.
- 7 TURN RATIO : (@10KHZ, 1Vrms) PIN 4-1 : PIN 5-8 = 1 +/-1%
- 8 POLARITY : PIN 4 & 5 INPHASE
- 9 LOGITUDINAL BALANCE : @300HZ~ 4KHZ = 60 dB MIN.
- 10 DISTORTION : (@300HZ, 1Vrms) -70dB MAX.
- 11 HI-POT(@3750 Vrms,1mA 1MIN) PRI-SEC

C	0.5 SQ. PIN OR Ø0.6 PIN	03/31/98	PAIR		SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-8887 FAX:(02)2794-8884	TITLE TRANSFORMER
B	PIN= 2.8 MIN.						DWG. NO. ATS-072
A	THD-70dB MAX.						
	RELEASE		PAIR		SUEDY	UNITS M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1
REVISIONS						E159603	DRAW Pair