
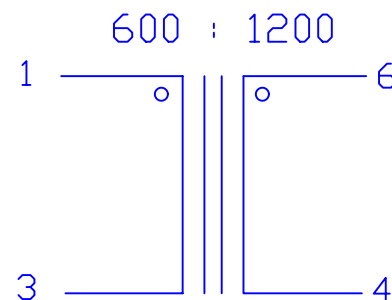
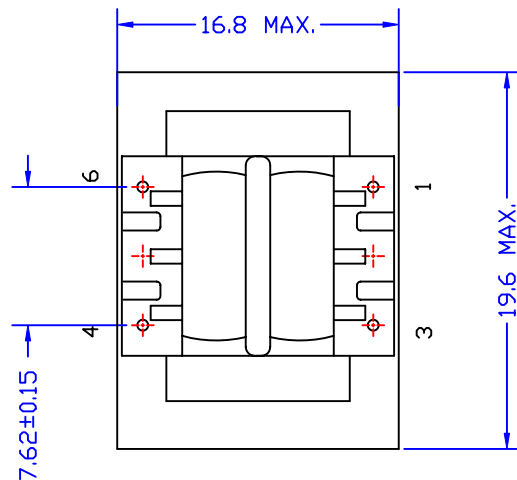


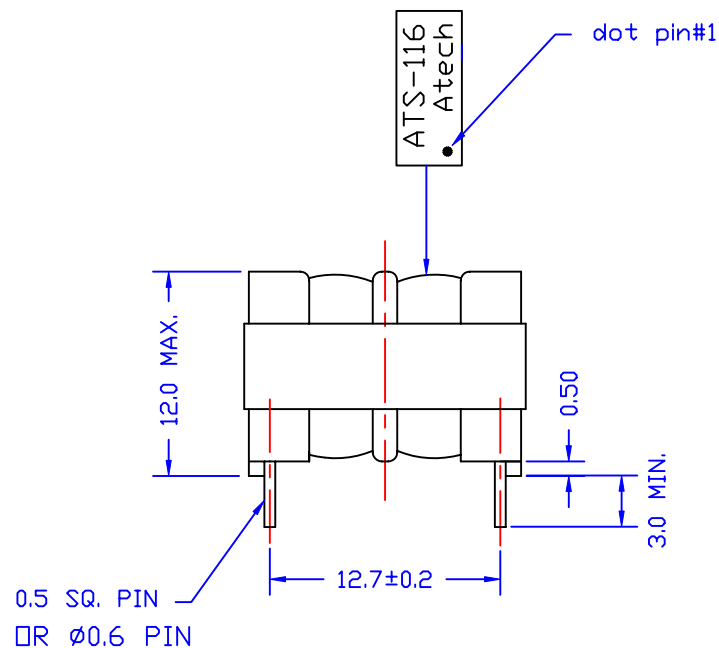

ELECTRICAL CHARACTERISTICS: (FOR V.32bis)

1. D.C.R. : PIN 1-3 = 14 OHM MAX. PIN 4-6 = 32 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 650mH MIN.
3. IMPEDANCE : (@1KHZ, 1Vrms, PIN 4-6 W/H 1200 OHM)
PIN 1-3 = 600 OHM+/-5%
4. INSERTION LOSS : (@1KHZ,1Vrms PIN 4-6 W/H 1200 OHM)
PIN 1-3 = 0.5dB MAX.
5. RETURN LOSS : (REF. 600 OHM, PIN 4-6 W/H 1200 OHM)
@300HZ = 23dB MIN.
@1KHZ = 25dB MIN.
@4KHZ = 20dB MIN.
7. FREQ. RESPONSE: (REF. 1KHZ) @300 HZ = +/-0.2dB
@4KHZ = +/-0.2dB
8. T.H.D. (@600HZ, -10 dBm) = -80 dB MAX.
11. HI-POT : (@3750VAC, 1mA, 1MINUTE) PIN 1-4

E	CHANGE DOT PIN#1	04/04/2005	BART	EEFLYS	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 1200 TRANSFORMER
D	PIN = 3.0 MIN.	09/10/99	PAIR		SUEDY		DWG. NO.
C	ADD Ø0.6 PIN	03/27/98	PAIR		SUEDY		ATS-116
	RELEASE	02/12/1993	PAIR		SUEDY	UNITS: M/M	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW
REVISIONS						02/12/93	Pair

E159603 