

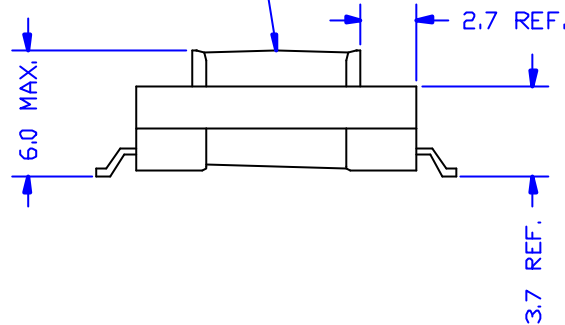
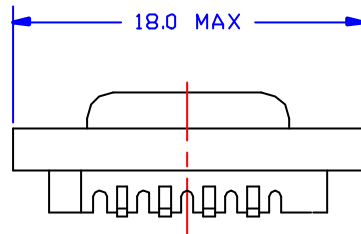


BLACK DOT PIN#1



THIS SIDE PIN#1

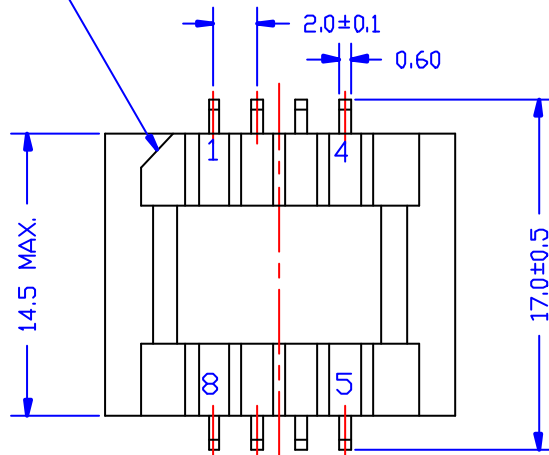

TRUE POSITION GRID
SURFACE MOUNT PATTERN

ELECTRICAL CHARACTERISTICS: (671-8269 COMPATIBLE)

- 1 D.C.R : PIN 4-1 = 132 OHM+/-10% PIN 5-8 = 132 OHM+/-10%
- 2 INDUCTANCE : (@1KHZ, 1Vrms) PIN 4-1 = 3H MIN.(PARALLEL)
- 3 IMPEDANCE :(@1KHZ, 1Vrms PIN 5-8 W/H 348 OHM LOAD)
PIN 4-1 = 600 OHM+/-2%
- 4 INSERTION LOSS :(@1KHZ, 1Vrms, PIN 5-8 W/H 348 OHM LOAD)
2.6 +/-0.15dB
- 5 FREQ. RESP. : (REF. 1KHZ)@300HZ = +/-0.15dB
@4KHZ = +/-0.15dB
- 6 RETURN LOSS : (REF. 600 OHM)@300HZ = 30dB MIN.
@1KHZ = 34dB MIN. @4KHZ = 30dB MIN.
- 7 TURN RATIO : (@20KHZ, 1Vrms) PIN 4-1 : PIN 5-8 = 1 +/-1%
- 8 POLARITY : PIN 4 & 5 INPHASE
- 9 LOGITUDINAL BALANCE : @200HZ - 1KHZ = 65 dB MIN.
@1KHZ - 4KHZ = 45dB MIN.
- 10 DISTORTION : (<600HZ, -10dB) -77dB MAX.
- 11 HI-POT (<1500 Vrms. 1mA 1MIN) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8887 FAX:(02)2794-8804	TITLE 600 : 348 TRANSFORMER	
							DWG. NO. ATS-125	
A TRUE POSITION								
	RELEASE		PAIR		SUEDY	UNITS M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS							E159603 	DRAW <i>Pair</i>