
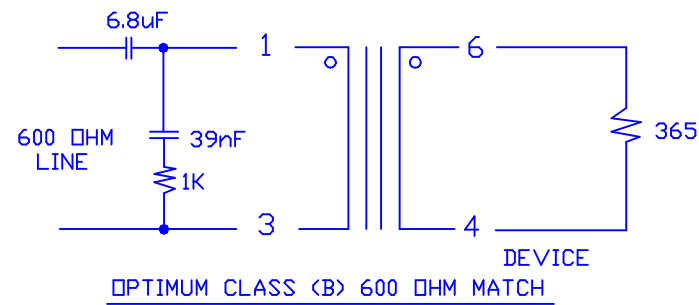
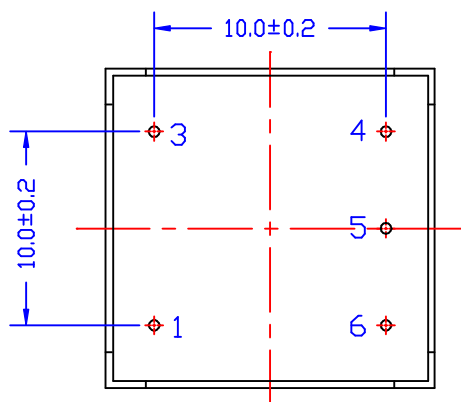
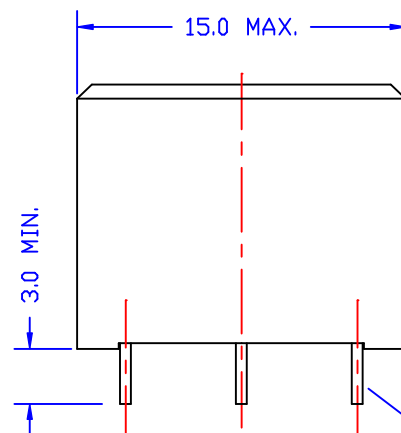


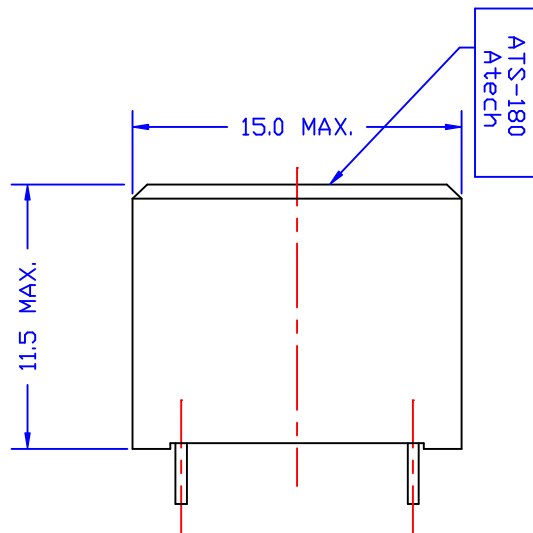

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH CWC 9009)

1. D.C.R. : PIN 1-3 = 127 OHM+/-10% PIN 6-4 = 127 OHM+/-10%
2. INDUCTANCE(@200HZ, 0.25 Vrms, PARALLEL) : PIN 1-3 = 6H MIN.
3. RETURN LOSS : (REF. 600 OHM) @300HZ = 22dB MIN.
@1KHZ = 32dB MIN. @3.4KHZ = 22dB MIN.
4. INSERTION LOSS : (@1KHZ,0dBm)3dB MAX.
5. FREQ.RESPONSE : (REF. 1KHZ,@300HZ) = +/-0.15dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (5KHZ, 0.25Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 450HZ, 0dBm : -82dB MAX.
9. HI-POT : (4000 VAC, 1mA, 1MIN.) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 365 TRANSFORMER	
B	ADD BAPT NO.	06/30/99	PAIR		SUEDY		DWG. NO. ATS-180	
A	Ø0.6 OR 0.5 SQ. PIN	03/31/98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY CRC.0060	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/07/96		DRAW <i>Pair</i>
REVISIONS								