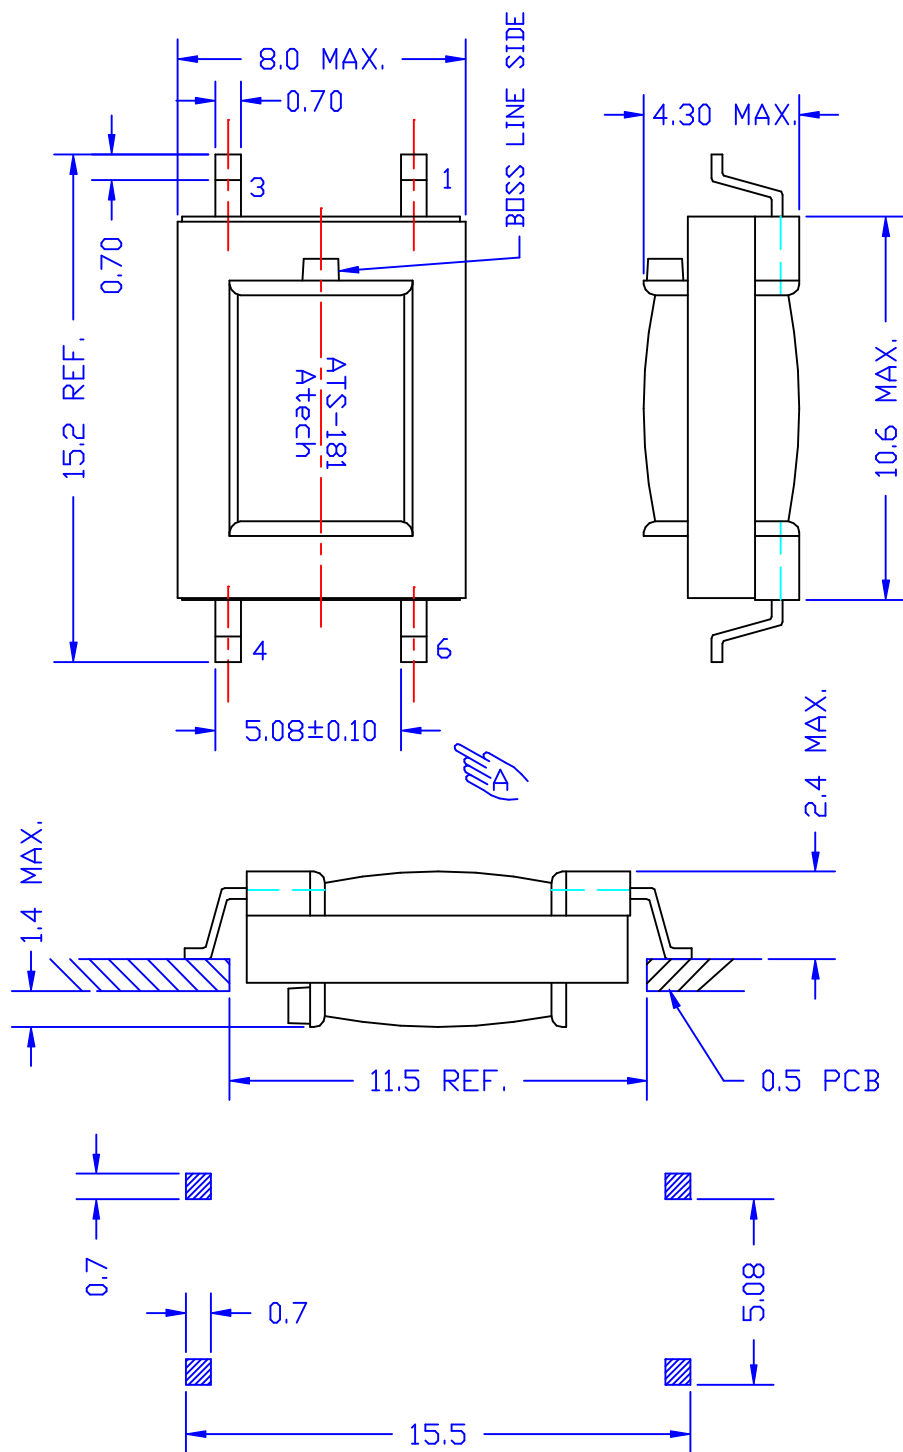


ELECTRICAL CHARACTERISTICS: (V.32bis FOR PCMCIA)

1. D.C.R. PIN 1-3 = 150 OHM +/-10% PIN 4-6 = 150 OHM +/-10%
2. INDUCTANCE (@250HZ, 0.5Vrms, PARALLEL) 1-3 = 3.1H MIN.
3. IMPEDANCE (@ 1KHZ, 0dBm, 6-4 W/H 301 OHM) 1-3 = 600 OHM+/-3%
4. INSERTION LOSS = 3.3 +/-0.25dB (@ 1KHZ, 0dBm, W/H 301 OHM LOAD)
5. FREQ. RESP. (@300HZ TO 4KHZ, REF. 1KHZ) = +/-0.12dB
6. RETURN LOSS @300HZ = 28dB MIN. @1KHZ = 30dB MIN. @ 4KHZ, = 30dB MIN.
7. TURN RATIO = 1:1 +/-1%
8. POLARITY = PIN 1-6 INPHASE
9. LONGITUDINAL BAL. = 70dB MIN. (@ 200HZ TO 4KHZ)
10. T.H.D. (@600HZ, -10dBm) = -78dB MAX.
11. HI-POT = 1250 VAC, 1mA, 2SEC. (PRI.-SEC.)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004	TITLE 600 : 301 TRANSFORMER
A	5.08±0.10						DWG. NO. ATS-181
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						01/19/96	DRAW <i>Pair</i>