
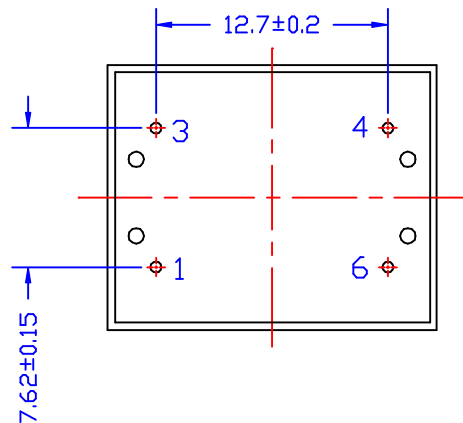
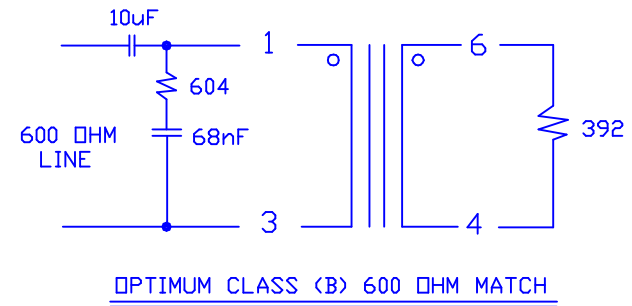


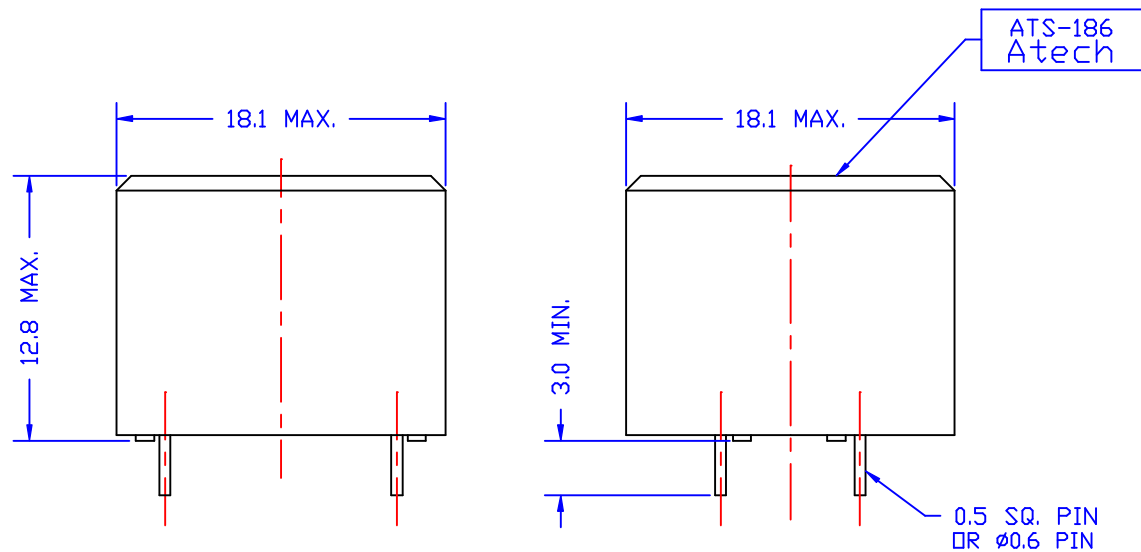

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH 671-8285)

1. D.C.R. : PIN 1-3 = 108 OHM +/-10% PIN 6-4 = 108 OHM +/-10%
2. INDUCTANCE (@1KHZ, 1Vrms, PARALLEL) : PIN 1-3 = 8H MIN.
3. RETURN LOSS : (REF. 600 OHM) @200HZ = 20dB MIN.
@1KHZ = 30dB MIN.
@4KHZ = 25dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) 2.5dB MAX.
5. FREQ. RESPONSE : (REF. 1KHZ) @200HZ = +/-0.5dB
@4KHZ = +/-3.5dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
7. TURN RATIO : (@3KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 600HZ, -10dBm : -82dB MAX.
9. HI-POT : (3750 VAC, 1mA, 2SEC) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 392 TRANSFORMER	
B	ADD BAPT NO.	06/30/98	PAIR		SUEDY			DWG. NO. ATS-186	
A	Ø0.6 PIN	03/27/98	PAIR		SUEDY				
	RELEASE		PAIR		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/21/96		CRC.0060	
								DRAW Pair	