
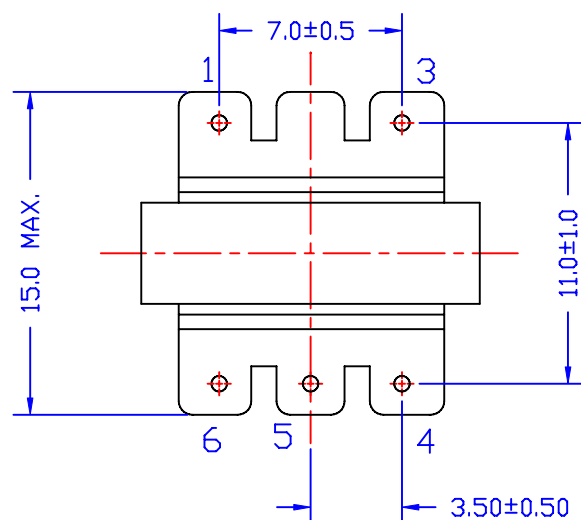
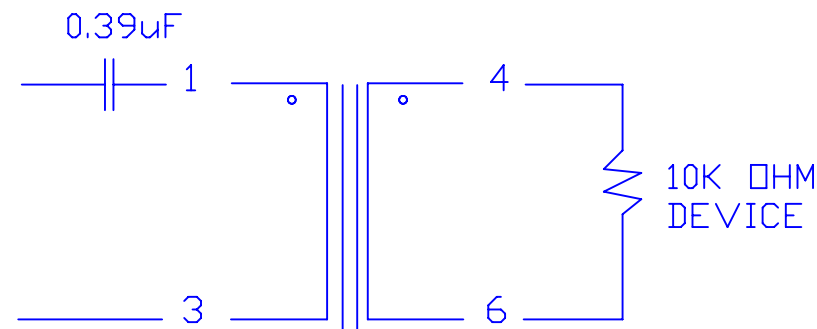


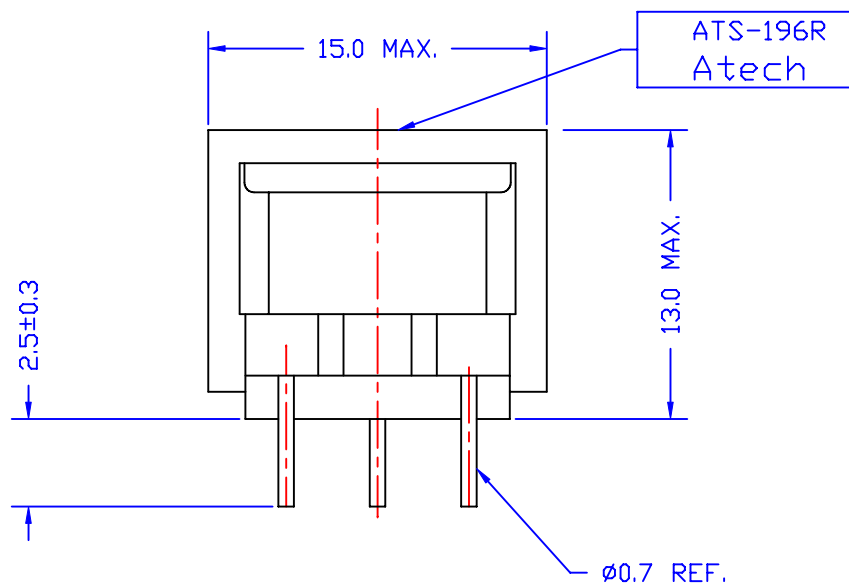

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 650 OHM MAX. PIN 4-6 = 810 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 11H MIN.
3. IMPEDANCE (@200HZ, 1Vrms, 4-6 W/H 10K OHM)
PIN 1-3 = 10K OHM+/-5%
4. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 10K OHM) : 1dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = +/-0.20dB
@4KHZ = +/-0.20dB
6. RETURN LOSS (REF. 10K OHM) : @200HZ = 25dB MIN.
@1KHZ = 20dB MIN. @4KHZ = 20dB MIN.
7. TURNS RATIO (@4KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT(@1200VAC, 1mA, 2SEC.) : PIN 1-4
9. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 10K : 10K TRANSFORMER	
								DWG. NO. ATS-196R	
	RELEASE	01/30/2007	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP31400CA		DRAW <i>Pair</i>
REVISIONS						01/30/07			