

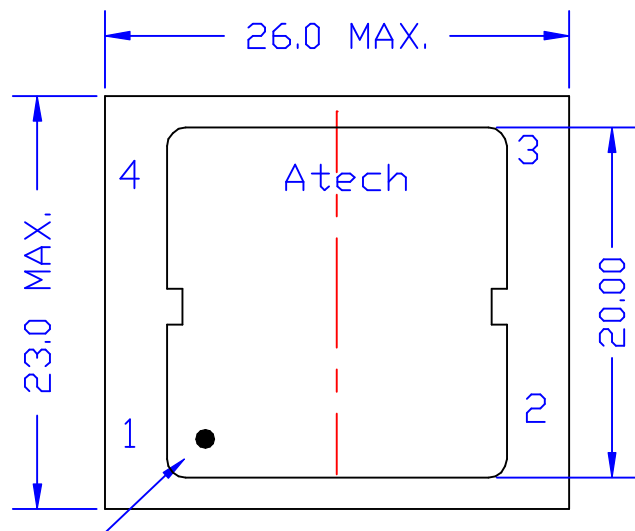


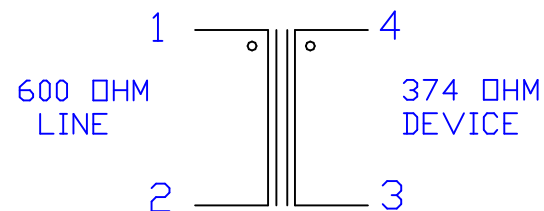

BLACK DOT PIN#1

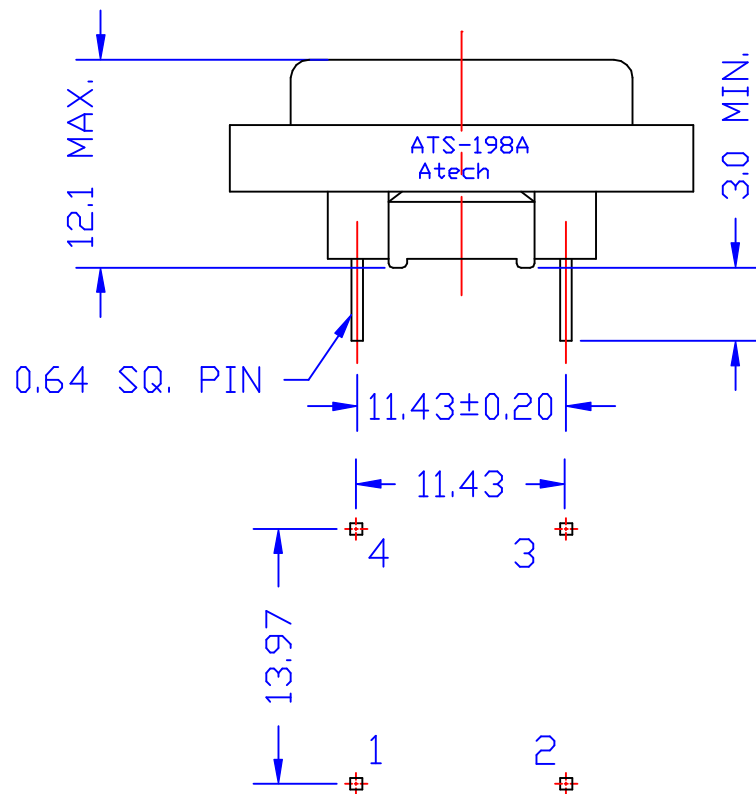

ELECTRICAL CHARACTERISTICS: (FOR V.34, 671-8056 COMPATIBLE)

1. D.C.R. : PIN 1-2 = 108 Ω M+/-10% PIN 3-4 = 120 Ω M+/-10%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL): PIN 1-2 = 14.5H MIN.
3. LEAKAGE INDUCTANCE(@250HZ, 1Vrms,SERIES) : PIN 1-2=7.5mH MAX.
4. RETURN LOSS : (REF. 600 Ω M) @ 300HZ = 28dB MIN.
@ 1KHZ = 24dB MIN.
@ 3KHZ = 20dB MIN.
5. INSERTION LOSS : (@1KHZ, 0dBm) 2.0 +/-0.2dB
6. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
8. TURN RATIO : (5KHZ, 0.1Vrms) PIN 1-2 : 4-3 = 1+/-1%
9. DISTORTION : 300HZ, -10dBm : -82dB MAX.
10. HI-POT : (@1500VAC, 1mA, 1MINUTE) PIN 1-4

						Atech®		TITLE 600 : 374 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-198A	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
A	ADD UL	06/17/98	PAIR		SUEDY	UNITS: M/M		SAFETY	
	RELEASE		PAIR		SUEDY			SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair	
REVISIONS						E159603			